
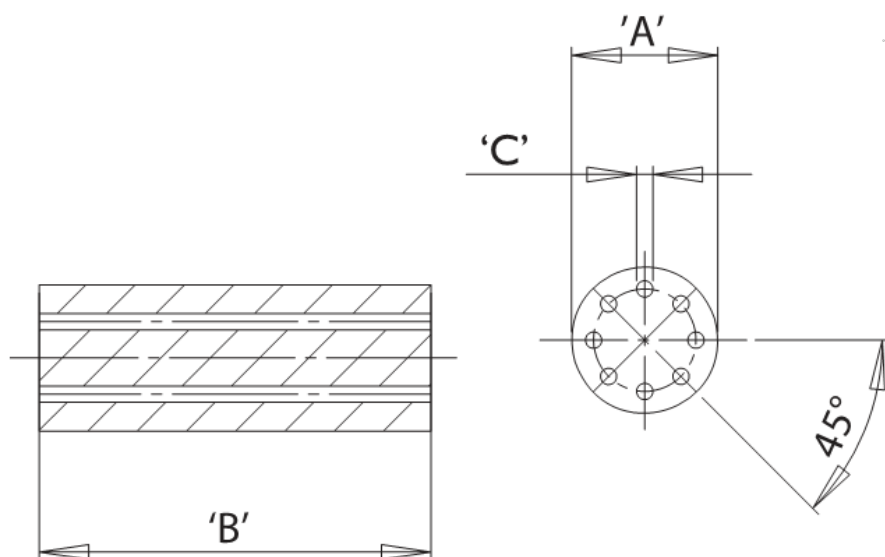


RRH6 - Wound Beads

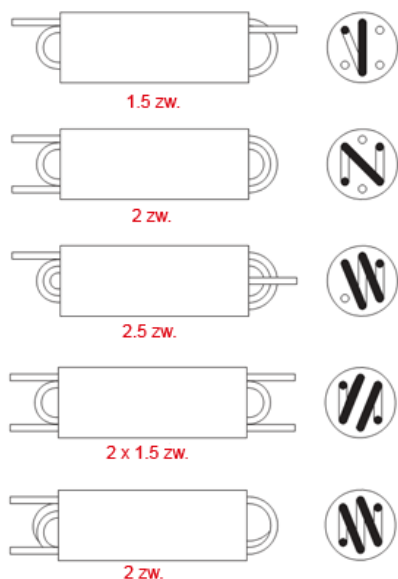

Details:

- **Ferrite Material: K5B - A6 RMS-303***
- **Glue: RMS-301***
- **Wires: RMS-306***
- The RRH6 type wide-band chokes are mainly used on PC boards to filter external EMI transmitted along external cables or connectors
- High performance medium current DC power and signal filtering
- Custom sizes are available by special order
- Impedance figures are typical values

Symbol	A	B	C	Impedance @25MHz	Impedance @100MHz	Standard pack	Nr of turns
	[mm]	[mm]	[mm]	[Ω]	[Ω]	[szt./pcs]	
RRH6-1-15-K5B	6	10	0.85	390	460	500	1.5
RRH6-1-20-K5B	6	10	0.85	510	580	500	2
RRH6-1-25-K5B	6	10	0.85	690	680	500	2.5
RRH6-2-15-K5B	6	10	0.85	340	450	500	2 x 1.5
RRH6-1-30-K5B	6	10	0.85	860	750	500	3