


## H-DC - Złączka przepustowa

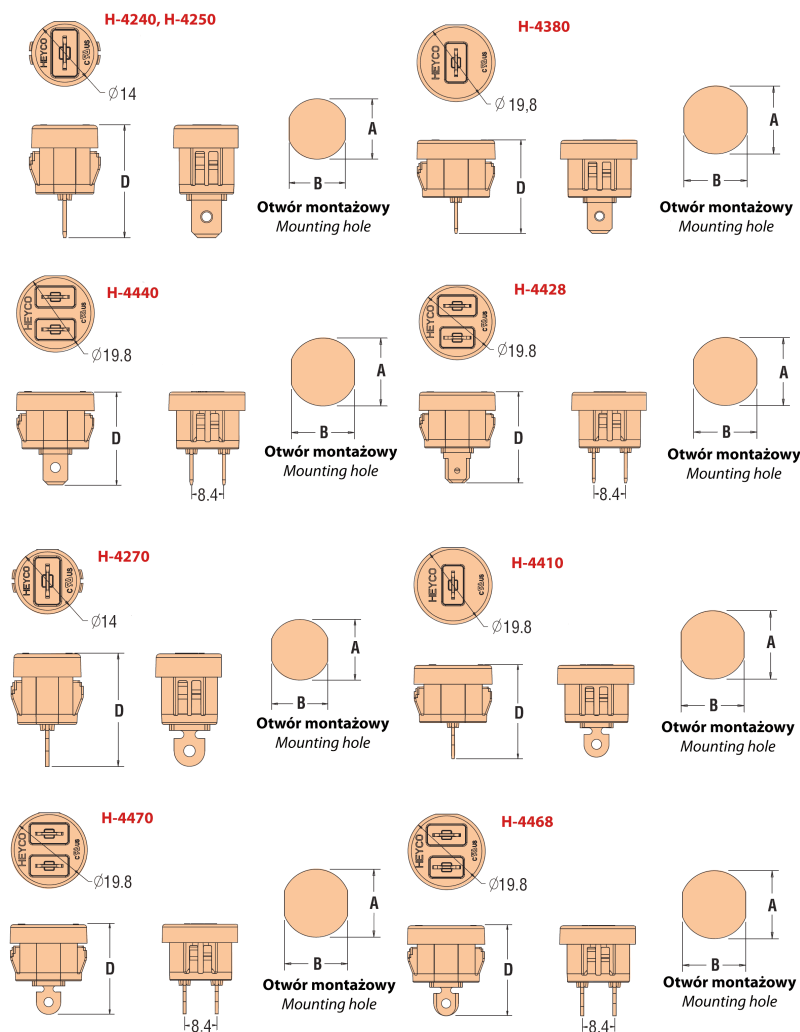

### Details:

- **Material:** Polycarbonate UL94 V-0
- **Colour:** black, other colours available on special order
- Certifications Recognized under the Component Program of Underwriters' Laboratories File E467283 to both Canadian and US Requirements Flammability
- Temperature Range: 32°C to 130°C
- Small, snap-in nylon receptacles for low cost, insulated, quick connection or disconnection of your wires, through panels, housings or detachable shrouds.
- Typical uses are data processing and vending machines, motors, power supplies, and controls.
- H-4240, H-4250, H-4380, H-4440, H-4428 - Bushings with Double Male Terminals
- H-4270, H-4410, H-4470, H-4468 - Bushings with Tinned Male to Solder Terminals

| Part No. | Polarized | No. of poles | Terminal width | A    | B    | C   | D    |
|----------|-----------|--------------|----------------|------|------|-----|------|
|          |           |              | [mm]           |      |      |     |      |
| H-4380   | no        | 1            | 6.4            | 17.4 | 16.3 | 3.2 | 23.9 |