


H-DD - Double D Hole Plugs

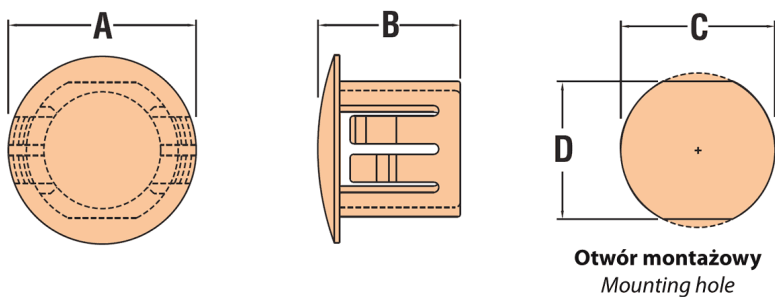

Details:

- **Material:** Nylon 6/6
- **Flammability Rating:** UL94 V-2
- **Colour:** black (BLK) or white (WH)
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579
- Multiple panel thickness design
- Convex, matte finish
- H-2617 i H-2618 - On installation, Locking Fingers must be aligned with Mounting Hole Flats
- H-2511 - Smaller than standard Head Diameter, for clearance situations.

Part No.	Mounting hole diameter D	Mounting hole diameter to prevent rotation C	A	B	Maks. panel thickness	Colour
	[mm]					
H-2617	9.5	8.8	11.9	10.3	3.2	BLK