


## H-DD - Double D Hole Plugs

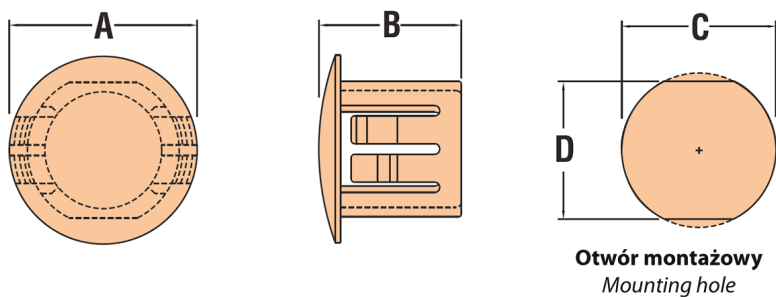

### Details:

- **Material:** Nylon 6/6
- **Flammability Rating:** UL94 V-2
- **Colour:** black (BLK) or white (WH)
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579
- Multiple panel thickness design
- Convex, matte finish
- H-2617 i H-2618 - On installation, Locking Fingers must be aligned with Mounting Hole Flats
- H-2511 - Smaller than standard Head Diameter, for clearance situations.

| Part No. | Mounting hole<br>diameter<br>D | Mounting hole<br>diameter<br>to prevent rotation<br>C | A    | B    | Maks. panel<br>thickness | Colour |
|----------|--------------------------------|-------------------------------------------------------|------|------|--------------------------|--------|
|          | [mm]                           |                                                       |      |      |                          |        |
| H-2510   | 22.2                           | 19.5                                                  | 25.8 | 11.5 | 3.2                      | WH     |