


H-DPT - Zaślepki kopułkowe, grube

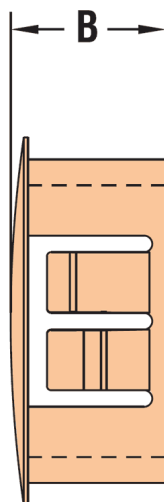

Details:

- **Material:** Nylon 6/6
- **Flammability Rating:** UL94 V-2
- **Colour:** black or white (other colours available on special order)
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919
- Convex, matte finish
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Approximate Head Thickness: 1.6 mm. Thickness may vary.

Part No.	Mounting hole diameter	A	B	Panel thickness	Colour
	[mm]				
H-3018	27.8 - 28.6	31.0	14.3	3.2 - 6.4	BLK