


## FP-8820 - Brass PG thread cable glands



O-Ring

Uszczelka O-Ring montowana od rozmiaru PG36  
 O-Ring pre-assembled from PG 36

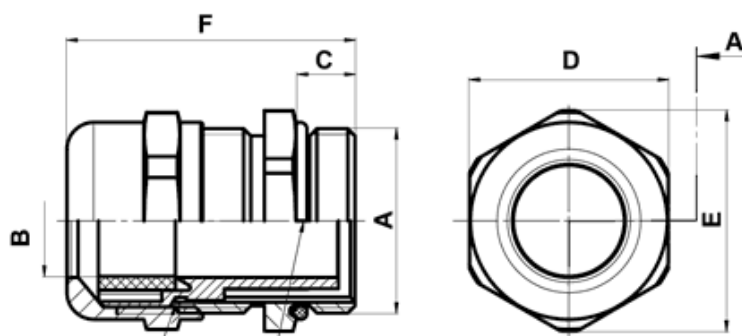

### Details:

- **Material:** Nickel plated brass
- **Lamellar insert:** PA 6 V-2
- **Sealing ring:** Polychloroprene nitrile
- Working temperature: -20°C up to +100°C
- Protection grade: IP68
- PG as per DIN 40430

| Part No. | A   | B         | C   | D    | E    | F    | Standard pack |
|----------|-----|-----------|-----|------|------|------|---------------|
|          |     | [mm]      |     |      |      |      | [pcs]         |
| 8904MA92 | PG9 | 4.0 - 8.0 | 6.0 | 17.0 | 17.0 | 29.0 | 100           |