


## FP-8820 - Brass PG thread cable glands



O-Ring

Uszczelka O-Ring montowana od rozmiaru PG36  
 O-Ring pre-assembled from PG 36

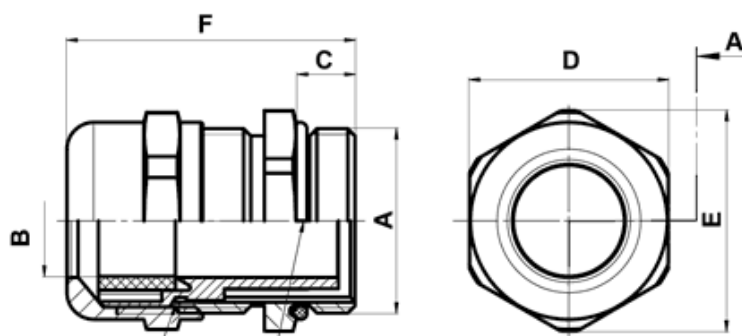

### Details:

- **Material:** Nickel plated brass
- **Lamellar insert:** PA 6 V-2
- **Sealing ring:** Polychloroprene nitrile
- Working temperature: -20°C up to +100°C
- Protection grade: IP68
- PG as per DIN 40430

| Part No. | A      | B          | C   | D    | E    | F    | Standard pack |
|----------|--------|------------|-----|------|------|------|---------------|
|          |        | [mm]       |     |      |      |      | [pcs]         |
| 8906MA92 | PG13.5 | 6.0 - 12.0 | 6.5 | 22.0 | 22.0 | 31.5 | 50            |