


## OR-MDLA-PG - Brass cable gland with PG thread, nickel plated

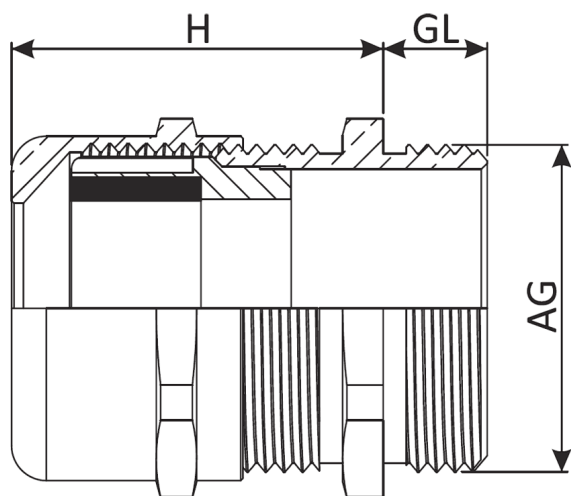

### Details:

- Material:
  - Body: brass, nickel plated
  - Clamping insert: PA6 UL94 V2
  - Sealing ring: TPV
  - O-Ring: NBR
- Thread: PG (DIN 40430)
- Protection class: IP68 (5 bar)
- Temperature range: -40°C to +100°C
- Easy to assemble
- Halogen free

| Part No.     | Thread | H    | GL  | Wrench size | Cables diameter range |
|--------------|--------|------|-----|-------------|-----------------------|
|              |        | [mm] |     |             |                       |
| OR-MDLA-PG21 | PG21   | 31.5 | 7.0 | 30          | 13 - 18               |