


## OR-MDLA-PG - Brass cable gland with PG thread, nickel plated

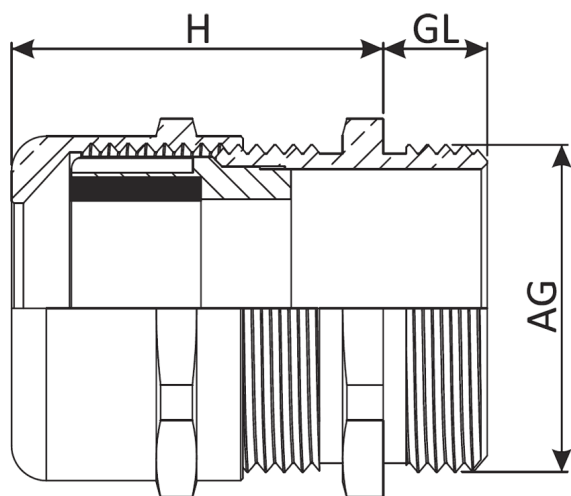

### Details:

- Material:
  - Body: brass, nickel plated
  - Clamping insert: PA6 UL94 V2
  - Sealing ring: TPV
  - O-Ring: NBR
- Thread: PG (DIN 40430)
- Protection class: IP68 (5 bar)
- Temperature range: -40°C to +100°C
- Easy to assemble
- Halogen free

| Part No.      | Thread | H    | GL   | Wrench size | Cables diameter range |
|---------------|--------|------|------|-------------|-----------------------|
|               |        | [mm] |      |             |                       |
| OR-MDLA-PG7-L | PG7    | 22.0 | 10.0 | 14          | 3 - 6.5               |