


OR-MDLA-PG - Brass cable gland with PG thread, nickel plated

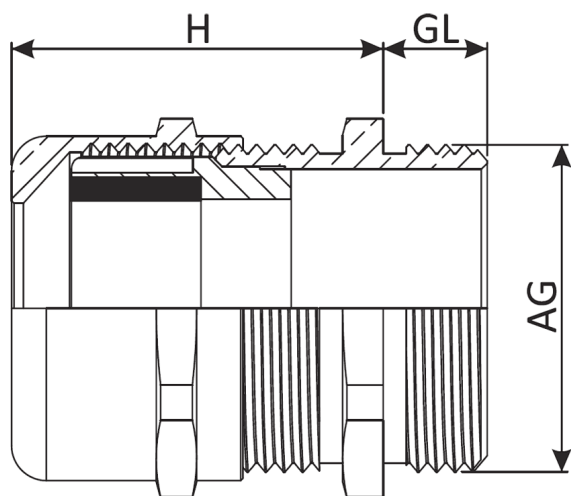

Details:

- Material:
 - Body: brass, nickel plated
 - Clamping insert: PA6 UL94 V2
 - Sealing ring: TPV
 - O-Ring: NBR
- Thread: PG (DIN 40430)
- Protection class: IP68 (5 bar)
- Temperature range: -40°C to +100°C
- Easy to assemble
- Halogen free

Part No.	Thread	H	GL	Wrench size	Cables diameter range
		[mm]			
OR-MDLA-PG13.5-L-RS	PG13.5	26.5	10.0	22	4 - 10