


CTS-O - Snap-in Cable Tie

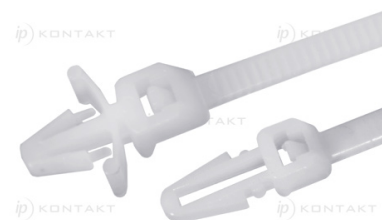

Details:

- **Polyamid 6.6, UL 94 V 2**
- **Color:** NAT - natural
- Hole mounting
- Working temperature: -35°C do +85°C
- Zgodność z: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: see table

Part No.	Length	Width	Max. bundle dia.	Max load	Standard pack	Hole dia.	Handle width	Type
	[mm]			[kg]	[pcs]	[mm]		
CTS-O-17048-PMT	170	4.8	38	22.2	100	Ø 6.4	~ 3.2	1