


## CTS-OUV - Snap-in Cable Tie, UV Resistant

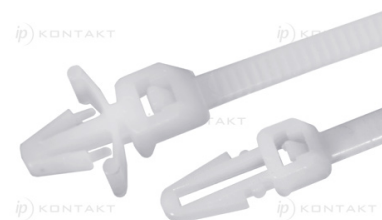

### Details:

- **Poliamid 6.6, UL 94 V-2 (V-0 on special order)**
- **Color:** black
- Hole mounting
- UV resistant
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: see table

| Part No.           | Length | Width | Max. bundle diameter | Max. load | Standard pack | Hole diameter | Handle width | Type |
|--------------------|--------|-------|----------------------|-----------|---------------|---------------|--------------|------|
|                    | [mm]   |       |                      | [kg]      | [pcs]         | [mm]          |              |      |
| CTS-O-19048-PMT-UV | 200    | 4.8   | 45                   | 22.2      | 100           | Ø 6.4         | ~ 3.2        | 1    |