


CTS-OUV - Snap-in Cable Tie, UV Resistant

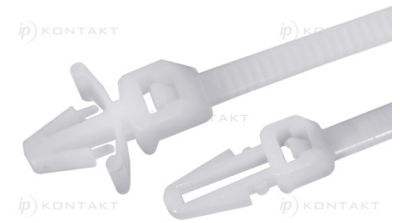

Details:

- **Poliamid 6.6, UL 94 V-2 (V-0 on special order)**
- **Color:** black
- Hole mounting
- UV resistant
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: see table

Part No.	Length	Width	Max. bundle diameter	Max. load	Standard pack	Hole diameter	Handle width	Type
	[mm]			[kg]	[pcs]	[mm]		
CTS-O-15036-PMT-UV	150	3.6	32	13.6	100	Ø 5.2	~ 2.8	2