


CTS-R - Releasable Cable Tie

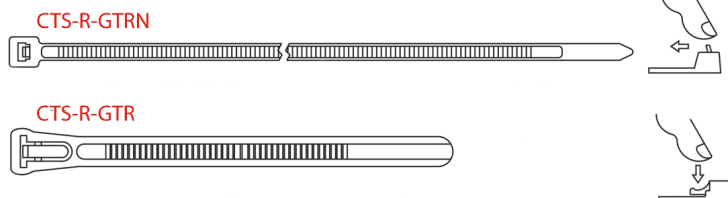

Details:

- **Poliamid 6.6, UL94 V-2 (V-0 on demand)**
- **Color:** natural, others on special order
- Releasable cable ties
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: see table

Part No.	A	B	max. cable bundle dia.	Max load	Standard pack
	[mm]			[kg]	[pcs]
CTS-R-GTRN-250-HD	250	7.6	66	22.2	100