


## CTS-R - Releasable Cable Tie

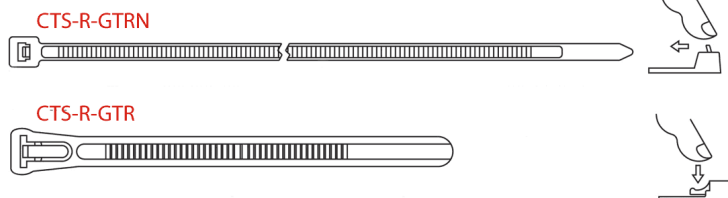

### Details:

- **Poliamid 6.6, UL94 V-2 (V-0 on demand)**
- **Color:** natural, others on special order
- Releasable cable ties
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: see table

| Part No.       | A    | B   | max. cable bundle dia. | Max load | Standard pack |
|----------------|------|-----|------------------------|----------|---------------|
|                | [mm] |     |                        | [kg]     | [pcs]         |
| CTS-R-GTR-140I | 140  | 3.6 | 33                     | 18.2     | 100 / 1000    |