
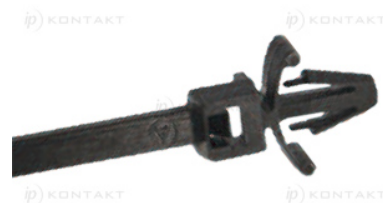


H-PMT - Opaski kablowe wciskane w otwór

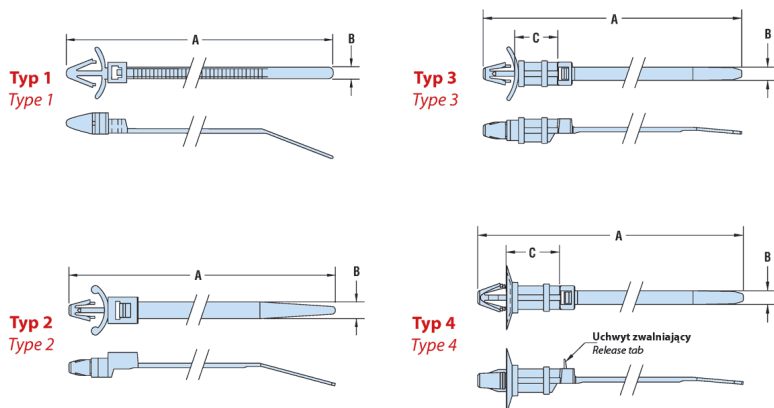

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural (NAT) or UV black (BLK UV)
- **Temperature Range:** -40°C to 85°C

Part No.	Tensile strength	Max. bundle diameter	A	B	C	Max. panel thickness	Mounting hole diameter	Type	Colour
	[N]								
H-13273	133	31.8	168	3.6	13.5	0.6 - 2.5	6.0 - 6.5	4	NAT