
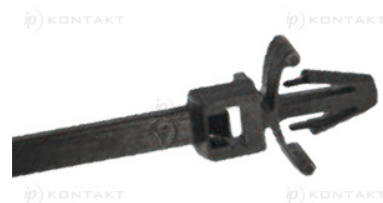


## H-PMT - Opaski kablowe wciskane w otwór

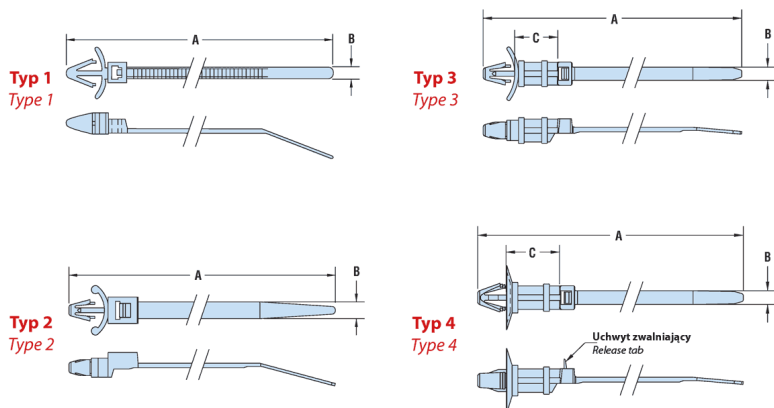

### Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural (NAT) or UV black (BLK UV)
- **Temperature Range:** -40°C to 85°C

| Part No. | Tensile strength | Max. bundle diameter | A   | B   | C    | Max. panel thickness | Mounting hole diameter | Type | Colour |
|----------|------------------|----------------------|-----|-----|------|----------------------|------------------------|------|--------|
|          | [N]              |                      |     |     |      |                      |                        |      |        |
| H-13273B | 133              | 31.8                 | 168 | 3.6 | 13.5 | 0.6 - 2.5            | 6.0 - 6.5              | 4    | BLK UV |