


O-SSP - Pressed Steel Bolt Down Feet

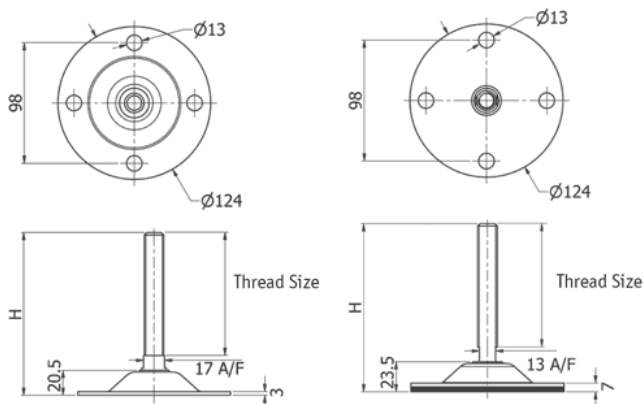

Details:

- **Material: Galvanised Steel, NBR 80 Rubber**
- High load capacity
- 8° articulation
- 4 x 12.5mm fixing holes
- With or without rubber pad for base
- Ideal for conveyors and machines

Part No.	Thread size	Rubber pad	H	Maximum static load	Standard pack
			[mm]	[N]	[pcs]
O-SSP-P-M20-134	M20 x 100	Tak	134	20000	2