


DTS-CW - Heavy Duty Double Sided Adhesive Tape

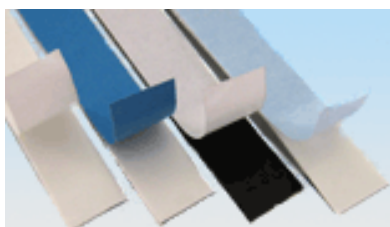

Details:

- DTS-CW is heavy duty mounting tape with a solvent acrylic adhesive.
- The tape is a real ALLROUNDER and offers an excellent ageing, UV, and chemical resistance against solvents and exterior weathering
- Applications: Mounting hooks, mirrors and displays, fixing decorative trims, emblems and holders, mounting in the furniture and automotive industry, exhibition and shop fitting
- The prohibited substances according to the RoHS directive (2002/95/EC) and 2006/122/EG (PFOS) are not included in this product
- Storage: Clean and dry in a well ventilated area, preferably at a temperature between 10°C and 30°C. Stored under these conditions shelf life will be a minimum of one year
- Application: Temperature: between +15°C and +30°C. Surface must be clean and free from dust and grease. Pressure sensitive adhesive must be applied with a maximum of pressure in order to achieve maximum pressure level. The indicated level of performance will be reached after a bonding period of 24 hours at 23°C.

Part No.	Adhesive	Carrier	Thickness	Liner	Peel 180°	Temperature
			[mm]		[N/25mm]	[°C]
DTS-CW-866 P	Akrylowy, rozpuszczalnik	Pianka PE, White	1,0	Papier, jasnoniebieski	> 10	-20 - +120