


## DTS-ZT - Wide temp. range double sided adhesive tape

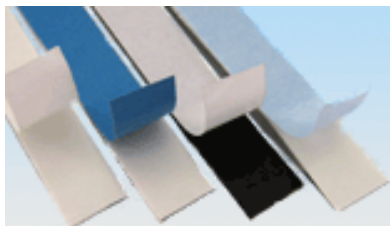

### Details:

- DTS-ZT is an extreme temperature double-sided foam bonding tape.
- The foam is a black Polyurethane material.
- An acrylic pressure sensitive adhesive is coated on both sides, and the product has a white paper release liner
- The tape has a good resistance to dilute acids and alkalis
- It is very good UV resistant and is suitable for indoor and outdoor environments
- Shear Adhesion (25 mm<sup>2</sup> on V2A steel, 1 kg weight at 23° and 50 % rel. atmospheric humidity): >500 h
- The prohibited substances according to the RoHS directive (2002/95/EC) and 2006/122/EG (PFOS) are not included in this product
- Storage: Clean and dry in a well ventilated area, preferably at a temperature between 10°C and 30°C. Stored under these conditions shelf life will be a minimum of one year
- Application: Temperature: between +15°C and +30°C. Surface must be clean and free from dust and grease. Pressure sensitive adhesive must be applied with a maximum of pressure in order to achieve maximum pressure level. The indicated level of performance will be reached after a bonding period of 24 hours at 23°C.

Part No.	Adhesive	Carrier	Thickness	Liner	Peel 180°	Temperature
			[mm]		[N/25mm]	[°C]
DTS-ZT-850	Akrylowy, rozpuszczalny	Pianka PU, czarny	0,4	Papier, biały	> 28	-40 - +120