


## DTS-AS - Double Sided Adhesive Tapes with Foam Carrier

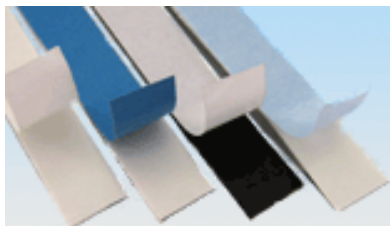

### Details:

- PE-foam tape coated on both sides with a dispersion acrylic adhesive.
- It is preferably used for:
  - fixing paper, cardboards etc.
  - 3D-greeting-cards (tinker-requires)
- Shear Adhesion (25 mm<sup>2</sup> on V2A steel, 1 kg weight at 23° and 50 % rel. atmospheric humidity): >10 h
- The prohibited substances according to the RoHS directive (2002/95/EC) and 2006/122/EG (PFOS) are not included in this product
- Storage: Clean and dry in a well ventilated area, preferably at a temperature between 10°C and 30°C. Stored under these conditions shelf life will be a minimum of one year
- Application: Temperature: between +15°C and +30°C. Surface must be clean and free from dust and grease. Pressure sensitive adhesive must be applied with a maximum of pressure in order to achieve maximum pressure level. The indicated level of performance will be reached after a bonding period of 24 hours at 23°C.

Part No.	Adhesive	Carrier	Thickness	Liner	Peel 180°	Temperature
			[mm]		[N/25mm]	[°C]
DTS-AS-865	Acrylic	PE foam, black	0.8	Paper, white	> 20	-40 - +100