


## OR-DL-WM-M - Metal cable glands, ventilated, metric thread

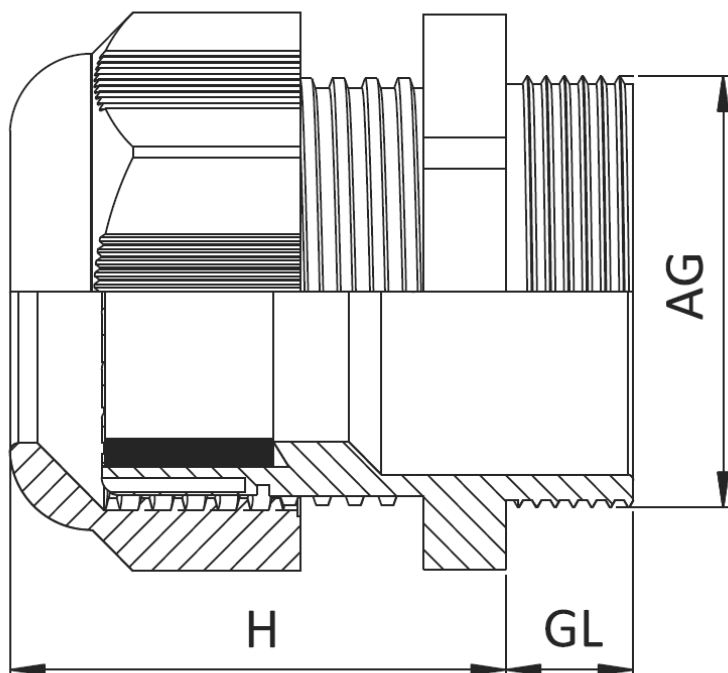

### Details:

- **Body material:** brass with/without nickel plated / AISI303/316L Stainless Steel
- **Plastic part:** PA6 V2 / V0
- **Sealing:** TPV / Silicone
- **O-ring:** NBR / EPDM / Silicone
- **Vent part:** Acrylic Co-Polymer on Nylon Support (Hydrophobic-Oleophobic)
- **Protection class:** IP68
- **Temperature Range:** -40 °C +105 °C
- Prevents the pressure inside the device to increase
- Prevents heat rise by providing air circulation
- Minimizes or even eliminates negative effects due to humidity in the environment
- Minimizes periodic cleaning costs by eliminating condensation and evaporation problems due to relative humidity in LED fittings and connection boxes
- Extends the life of the device

| Part No.          | Thread  | H    | G | SW | Mounting hole diameter | Cable dia. range | Material        |
|-------------------|---------|------|---|----|------------------------|------------------|-----------------|
|                   |         | [mm] |   |    |                        |                  |                 |
| OR-DL-WMS-M16x1.5 | M16x1.5 | 31.5 | 6 | 20 | 16.3                   | 5-10             | stainless steel |