



O-WRGK - Threaded Inserts



Typ 1

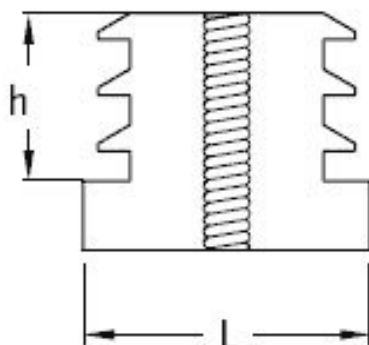

Typ 2



Details:

- Material: see table
- Can be used with either adjustable feet (O-SWNP, O-SWOP, O-SWP, O-SNNP, O-SOP) or adjustable tilt glides (O-SNP)
- Suitable for wall thickness of 1.0 - 2.0mm
- Standard pack: see table

Part No	Type	Shape	Gauge	Thread	L	L	h	Material	Standard pack
			[mm]		[inch]	[mm]			[pcs]
O-WRGK1-16-317	1 - calowe	kwadratowe	16	M8	11/4	31.7	-	HIPS	500