



O-WRGK - Threaded Inserts



Typ 1

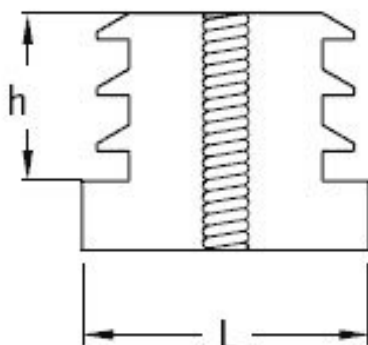

Typ 2



Details:

- Material: see table
- Can be used with either adjustable feet (O-SWNP, O-SWOP, O-SWP, O-SNNP, O-SOP) or adjustable tilt glides (O-SNP)
- Suitable for wall thickness of 1.0 - 2.0mm
- Standard pack: see table

Part No	Type	Shape	Gauge	Thread	L	L	h	Material	Standard pack
			[mm]		[inch]				[pcs]
O-WRGP2-60x30-M10 ^1	2 - metr.	prostokątne	-	M10	-	60 x 30	16	LDPE	250