



## O-WRGK - Threaded Inserts



Typ 1

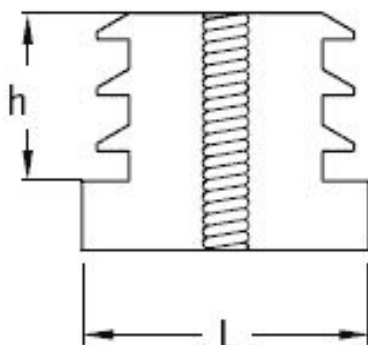

Typ 2



### Details:

- Material: see table
- Can be used with either adjustable feet (O-SWNP, O-SWOP, O-SWP, O-SNNP, O-SOP ) or adjustable tilt glides (O-SNP)
- Suitable for wall thickness of 1.0 - 2.0mm
- Standard pack: see table

| Part No       | Type      | Shape   | Gauge | Thread | L      | L    | h  | Material | Standard pack |
|---------------|-----------|---------|-------|--------|--------|------|----|----------|---------------|
|               |           |         | [mm]  |        | [inch] | [mm] |    |          | [pcs]         |
| O-WRGO2-16-M6 | 2 - metr. | okrągłe | -     | M6     | -      | 16.0 | 34 | Nylon    | 3500          |