

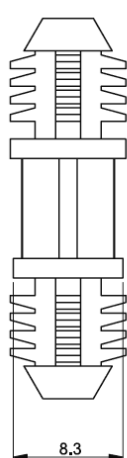


BHDF - Blind Hole Circuit Board Support

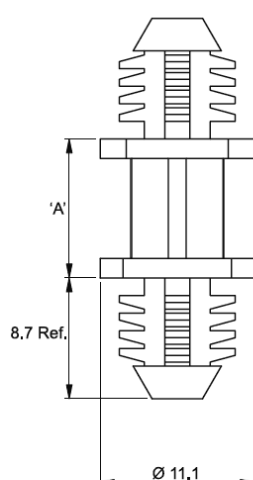

Otwór górny: Ø7.92 ± 0.8
Grubość panelu: min. 6.35

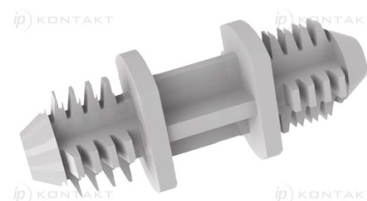

Otwór dolny: Ø7.92 ± 0.08
Grubość panelu: min. 6.35

Details:

- **Material and color: see table**
- **Standard pack: 1000 pcs**

Symbol	Height A ±0.4	Top mounting hole dia. ±0.08	Top panel thickness range	Bottom mounting hole dia. ±0.08	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
BHDF-3M-01	3	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-3M-19	3	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-4M-01	4	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-4M-19	4	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-6M-01	6	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-6M-19	6	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-8M-01	8	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-8M-19	8	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-10M-01	10	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-10M-19	10	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-12M-01	12	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-12M-19	12	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-14M-01	14	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-14M-19	14	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-16M-01	16	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-16M-19	16	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-18M-01	18	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-18M-19	18	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural
BHDF-20M-01	20	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-2	natural
BHDF-20M-19	20	7.92	6.35 min.	7.92	6.35 min.	PA 66	UL94 V-0	natural