


BHKL - Blind Hole Kurly Lock

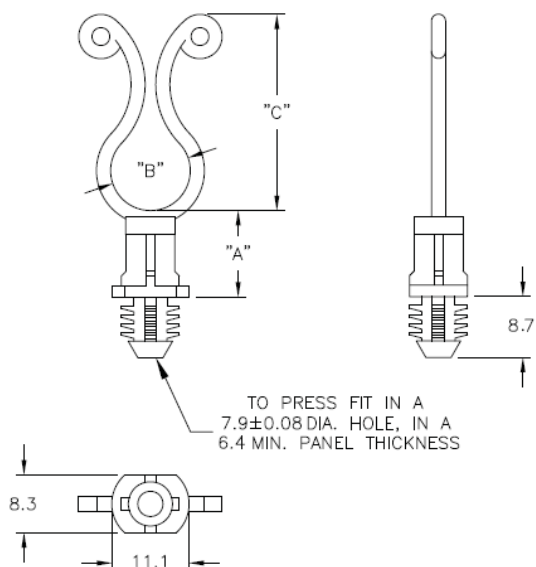

Details:

- **Nylon 6/6, UL 94 V-2, RMS-01 ***
- **Mounting hole diameter:** 7.9 ± 0.08 mm
- **Panel thickness:** min. 6.4 mm
- **Color:** natural
- Minimum order qty: 1000 pcs

Symbol	A	Cable diameter range B	C	Mounting hole diameter ± 0.08	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
BHKL-350-4-01	6.4	7.6 - 10.2	25.4	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-350-10-01	15.9	7.6 - 10.2	25.4	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-450-4-01	6.4	10.2 - 12.7	28.6	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-450-6-01	9.5	10.2 - 12.7	28.6	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-450-8-01	12.7	10.2 - 12.7	28.6	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-450-10-01	15.9	10.2 - 12.7	28.6	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-750-4-01	6.4	17.8 - 20.3	38.1	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-750-6-01	9.5	17.8 - 20.3	38.1	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-750-8-01	12.7	17.8 - 20.3	38.1	7.9	6.4 min.	PA 66	UL94 V-2	natural
BHKL-750-10-01	15.9	17.8 - 20.3	38.1	7.9	6.4 min.	PA 66	UL94 V-2	natural