


BHL - Locking Circuit Board Support

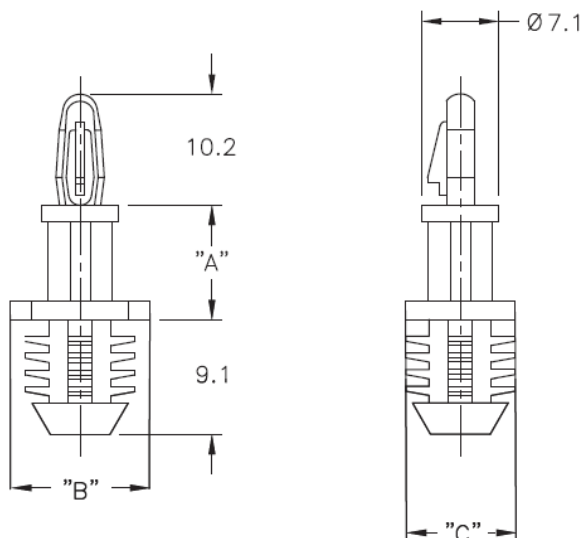

Details:

- **Material:** UL94 V2 Nylon 6/6, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19 *
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Height A ±0.4	B ±0.4	C ±0.4	Top mounting hole dia. ±0.08	Top panel thickness	Bottom mounting hole dia. ±0.08	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
BHL-3-01	4.8	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-2	natural
BHL-3-19	4.8	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-0	natural
BHL-4-01	6.4	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-2	natural
BHL-4-19	6.4	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-0	natural
BHL-6-01	9.5	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-2	natural
BHL-6-19	9.5	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-0	natural
BHL-7-01	11.1	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-2	natural
BHL-7-19	11.1	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-0	natural
BHL-8-01	12.7	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-2	natural
BHL-8-19	12.7	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-0	natural
BHL-10-01	15.9	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-2	natural
BHL-10-19	15.9	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-0	natural
BHL-12-01	19.1	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-2	natural
BHL-12-19	19.1	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-0	natural
BHL-14-01	22.2	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-2	natural
BHL-14-19	22.2	11.1	7.9	4	1.57	7.92	min. 6.4	PA 66	UL94 V-0	natural