


## BM-WOWMG - Threaded inserts for oval tubes with pressed in high nut

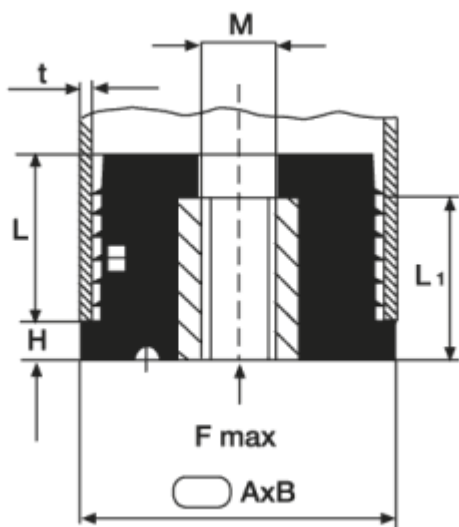

### Details:

- **Material:** Nylon 6 + thread zinc-plated steel
- **Colour:** black

| Symbol             | Insert dimensions<br>A × B | Max. load | H | L    | L <sub>1</sub> | Metric thread<br>M | Tube wall thickness<br>range<br>t | Material | Color |
|--------------------|----------------------------|-----------|---|------|----------------|--------------------|-----------------------------------|----------|-------|
|                    | [mm]                       |           |   |      |                |                    | [mm]                              |          |       |
| BM-WOWMG-M8-30-10  | 30 × 15                    | 300       | 5 | 19.5 | 20             | M8                 | 1                                 | PA 6     | black |
| BM-WOWMG-M8-30-15  | 30 × 15                    | 300       | 5 | 19.5 | 20             | M8                 | 1.5                               | PA 6     | black |
| BM-WOWMG-M8-35-20  | 35 × 20                    | 300       | 5 | 19.5 | 20             | M8                 | 1.5 - 2.0                         | PA 6     | black |
| BM-WOWMG-M10-35-20 | 35 × 20                    | 300       | 5 | 19.5 | 20             | M10                | 1.5 - 2.0                         | PA 6     | black |
| BM-WOWMG-M8-38-30  | 38 × 20                    | 300       | 5 | 19.5 | 20             | M8                 | 1.5 - 3.0                         | PA 6     | black |
| BM-WOWMG-M8-40-40  | 40 × 20                    | 300       | 5 | 19.5 | 20             | M8                 | 1.5 - 4.0                         | PA 6     | black |
| BM-WOWMG-M10-38-50 | 38 × 20                    | 300       | 5 | 19.5 | 20             | M10                | 1.5 - 5.0                         | PA 6     | black |
| BM-WOWMG-M10-40-60 | 40 × 20                    | 300       | 5 | 19.5 | 20             | M10                | 1.5 - 6.0                         | PA 6     | black |