


BT - Beaded Tie

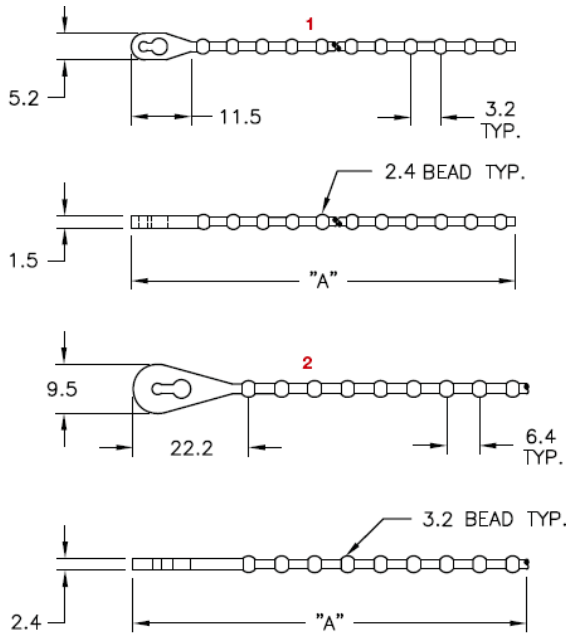

Details:

- **Material: PP, RMS-10***
- **Material: PP, RMS-01***
- **Color: see table**
- **Standard Pack: 1000/Bag**

Symbol	Length A	Max. cable bundle diameter [mm]	Type	Material	Flammability	Color
	[mm]					
BT-2-10-BK	63.5	14.3	1	PP	UL94 HB	black
BT-2-10-BL	63.5	14.3	1	PP	UL94 HB	blue
BT-2-10-RD	63.5	14.3	1	PP	UL94 HB	red
BT-2-10-YL	63.5	14.3	1	PP	UL94 HB	yellow
BT-4-10-BK	101.6	25.4	1	PP	UL94 HB	black
BT-4-10-BL	101.6	25.4	1	PP	UL94 HB	blue
BT-4-10-RD	101.6	25.4	1	PP	UL94 HB	red
BT-4-10-YL	101.6	25.4	1	PP	UL94 HB	yellow
BT-5-10-BK	127	31.8	1	PP	UL94 HB	black
BT-5-10-BL	127	31.8	1	PP	UL94 HB	blue
BT-5-10-RD	127	31.8	1	PP	UL94 HB	red
BT-5-10-YL	127	31.8	1	PP	UL94 HB	yellow
BT-6-10-BK	152.4	44.5	1	PP	UL94 HB	black
BT-6-10-BL	152.4	44.5	1	PP	UL94 HB	blue
BT-6-10-RD	152.4	44.5	1	PP	UL94 HB	red
BT-6-10-YL	152.4	44.5	1	PP	UL94 HB	yellow
BT-8-10-BL	222.3	60.3	2	PP	UL94 HB	blue
BT-8-10-RD	222.3	60.3	2	PP	UL94 HB	red
BT-8-10-YL	222.3	60.3	2	PP	UL94 HB	yellow
BT-10-10-BK	273.1	85.7	2	PP	UL94 HB	black
BT-10-10-BL	273.1	85.7	2	PP	UL94 HB	blue
BT-10-10-RD	273.1	85.7	2	PP	UL94 HB	red
BT-10-10-YL	273.1	85.7	2	PP	UL94 HB	yellow
BT-12-10-BK	323.9	92.1	2	PP	UL94 HB	black

Symbol	Length A	Max. cable bundle diameter [mm]	Type	Material	Flammability	Color
	[mm]					
BT-12-10-BL	323.9	92.1	2	PP	UL94 HB	blue
BT-12-10-RD	323.9	92.1	2	PP	UL94 HB	red
BT-12-10-YL	323.9	92.1	2	PP	UL94 HB	yellow
BT-2-01-BK	63.5	14.3	1	PA 66	UL94 V-2	black
BT-4-01-BK	101.6	25.4	1	PA 66	UL94 V-2	black
BT-5-01-BK	127	31.8	1	PA 66	UL94 V-2	black
BT-6-01-BK	152.4	44.5	1	PA 66	UL94 V-2	black
BT-8-01-BK	222.3	60.3	2	PA 66	UL94 V-2	black
BT-10-01-BK	273.1	85.7	2	PA 66	UL94 V-2	black
BT-12-01-BK	323.9	92.1	2	PA 66	UL94 V-2	black
BT-2-01-NT	63.5	14.3	1	PA 66	UL94 V-2	natural
BT-4-01-NT	101.6	25.4	1	PA 66	UL94 V-2	natural
BT-5-01-NT	127	31.8	1	PA 66	UL94 V-2	natural
BT-6-01-NT	152.4	44.5	1	PA 66	UL94 V-2	natural
BT-8-01-NT	222.3	60.3	2	PA 66	UL94 V-2	natural
BT-10-01-NT	273.1	85.7	2	PA 66	UL94 V-2	natural
BT-12-01-NT	323.9	92.1	2	PA 66	UL94 V-2	natural