


CBS - Locking Circuit Board Support

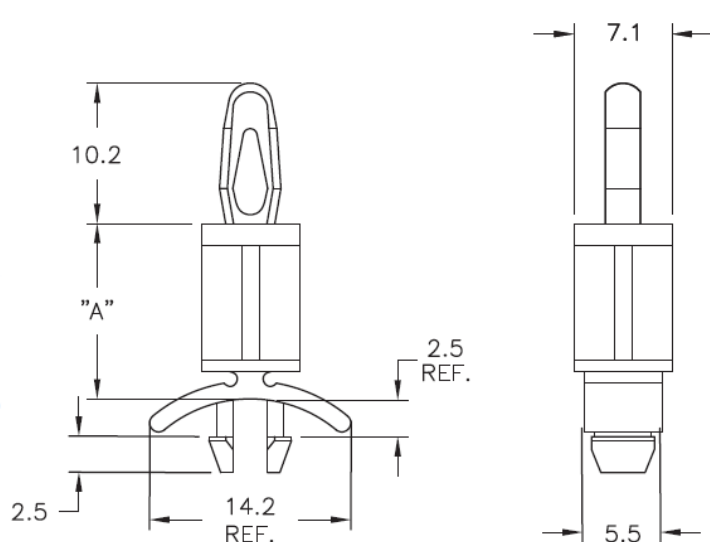

Details:

- **Nylon 6/6, UL 94 V-2, RMS-01 ***
- **Nylon 6/6, UL 94 V-0, RMS-19 ***
- **Colour:** natural

Symbol	Height A	Top mounting hole dia. ±0.08	Top panel thickness	Bottom mounting hole dia. ±0.08	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
CBS-3-01	4.8	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-2	natural
CBS-3-19	4.8	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-0	natural
CBS-4-01	6.4	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-2	natural
CBS-4-19	6.4	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-0	natural
CBS-6-01	9.5	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-2	natural
CBS-6-19	9.5	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-0	natural
CBS-8-01	12.7	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-2	natural
CBS-8-19	12.7	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-0	natural
CBS-10-01	15.9	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-2	natural
CBS-10-19	15.9	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-0	natural
CBS-12-01	19.1	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-2	natural
CBS-12-19	19.1	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-0	natural
CBS-14-01	22.2	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-2	natural
CBS-14-19	22.2	4	1.57	4.75	0.79 - 1.98	PA 66	UL94 V-0	natural