


CBS-TF - Circuit Board Support

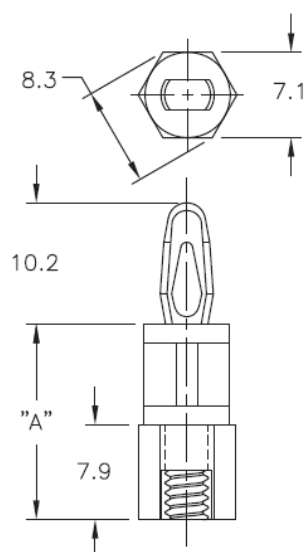

Details:

- **Material: Nylon 6/6, UL 94 V-2, RMS-01***
- **Material: Nylon 6/6, UL 94 V-0, RMS-19***
- **Colour: natural**
- **Standard pack: 1000 pcs**

Symbol	Height A ±0.4	Top mounting hole dia. ±0.08	Top panel thickness	Int. thread	Material	Flammability	Color
	[mm]	[mm]	[mm]				
CBS-TF-M4-6-01	9.5	4	1.57	M4	PA 66	UL94 V-2	natural
CBS-TF-M4-6-19	9.5	4	1.57	M4	PA 66	UL94 V-0	natural
CBS-TF-M4-8-01	12.7	4	1.57	M4	PA 66	UL94 V-2	natural
CBS-TF-M4-8-19	12.7	4	1.57	M4	PA 66	UL94 V-0	natural
CBS-TF-M4-10-01	15.9	4	1.57	M4	PA 66	UL94 V-2	natural
CBS-TF-M4-10-19	15.9	4	1.57	M4	PA 66	UL94 V-0	natural
CBS-TF-M4-12-01	19.1	4	1.57	M4	PA 66	UL94 V-2	natural
CBS-TF-M4-12-19	19.1	4	1.57	M4	PA 66	UL94 V-0	natural
CBS-TF-M4-14-01	22.2	4	1.57	M4	PA 66	UL94 V-2	natural
CBS-TF-M4-14-19	22.2	4	1.57	M4	PA 66	UL94 V-0	natural
CBS-TF-M4-16-01	25.4	4	1.57	M4	PA 66	UL94 V-2	natural
CBS-TF-M4-16-19	25.4	4	1.57	M4	PA 66	UL94 V-0	natural
CBS-TF-6-01	9.5	4	1.57	UNC 6-32	PA 66	UL94 V-2	natural
CBS-TF-6-19	9.5	4	1.57	UNC 6-32	PA 66	UL94 V-0	natural
CBS-TF-8-01	12.7	4	1.57	UNC 6-32	PA 66	UL94 V-2	natural
CBS-TF-8-19	12.7	4	1.57	UNC 6-32	PA 66	UL94 V-0	natural
CBS-TF-10-01	15.9	4	1.57	UNC 6-32	PA 66	UL94 V-2	natural
CBS-TF-10-19	15.9	4	1.57	UNC 6-32	PA 66	UL94 V-0	natural
CBS-TF-12-01	19.1	4	1.57	UNC 6-32	PA 66	UL94 V-2	natural
CBS-TF-12-19	19.1	4	1.57	UNC 6-32	PA 66	UL94 V-0	natural
CBS-TF-14-01	22.2	4	1.57	UNC 6-32	PA 66	UL94 V-2	natural
CBS-TF-14-19	22.2	4	1.57	UNC 6-32	PA 66	UL94 V-0	natural
CBS-TF-16-01	25.4	4	1.57	UNC 6-32	PA 66	UL94 V-2	natural
CBS-TF-16-19	25.4	4	1.57	UNC 6-32	PA 66	UL94 V-0	natural