

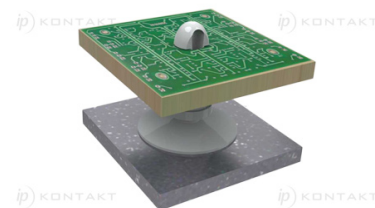


CHDLCBST - Cupped Dual Locking Circuit Board Support

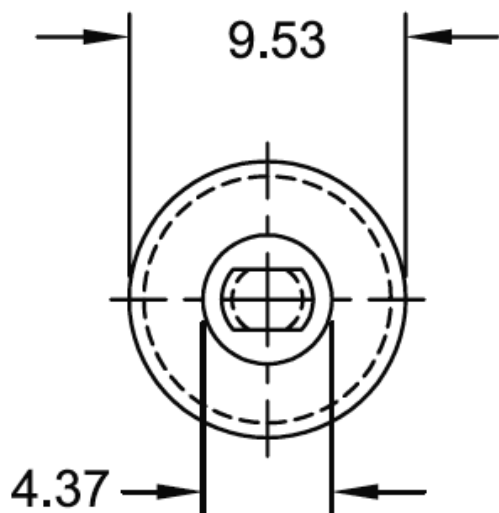

Otwór górny: $\varnothing 2.54 \pm 0.05$

Grubość Panelu: 1.63

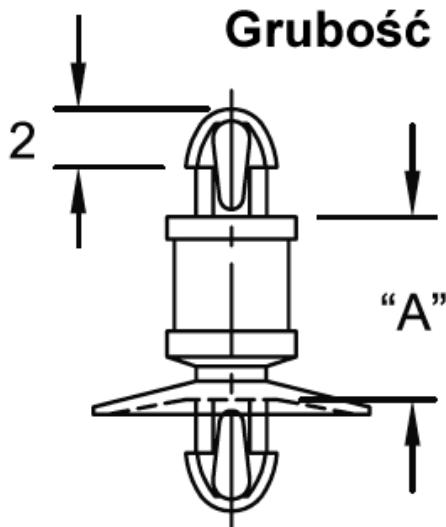

Otwór dolny: $\varnothing 2.54 \pm 0.05$

Grubość Panelu: 1.57

Details:

- **Material:** UL94 V-2 Nylon 6/6, RMS-01*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Height A	Top mounting hole dia. ± 0.05	Top panel thickness	Bottom mounting hole dia. ± 0.05	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
CHDLCBST-2-01	3.18	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural

Symbol	Height A	Top mounting hole dia. ±0.05	Top panel thickness	Bottom mounting hole dia. ±0.05	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
CHDLCBST-3-01	4.76	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural
CHDLCBST-4-01	6.35	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural
CHDLCBST-5-01	7.94	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural
CHDLCBST-6-01	9.53	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural
CHDLCBST-7-01	11.11	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural
CHDLCBST-8-01	12.7	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural
CHDLCBST-9-01	14.29	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural
CHDLCBST-10-01	15.88	2.54	1.63	2.54	1.57	PA 66	UL94 V-2	natural