


CPST - Push Spacer Teardrop

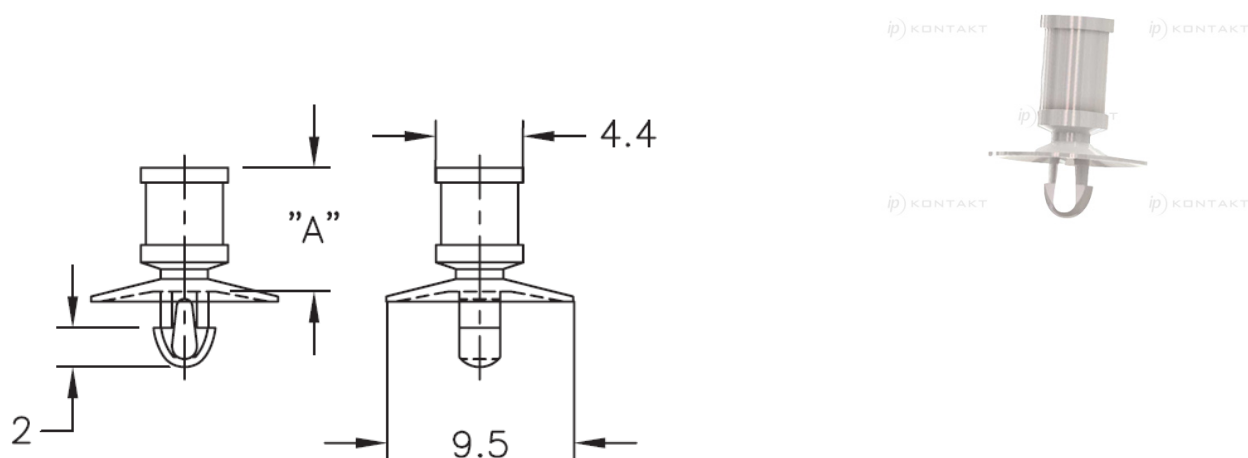

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- **Standard pack:** 1000 pcs

Symbol	Height A ±0.4	Bottom mounting hole dia. ±0.05	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]			
CPST-2-01	3.2	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-2-19	3.2	2.54	max 1.57	PA 66	UL94 V-0	natural
CPST-3-01	4.8	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-3-19	4.8	2.54	max 1.57	PA 66	UL94 V-0	natural
CPST-4-01	6.4	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-4-19	6.4	2.54	max 1.57	PA 66	UL94 V-0	natural
CPST-5-01	7.9	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-5-19	7.9	2.54	max 1.57	PA 66	UL94 V-0	natural
CPST-6-01	9.5	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-6-19	9.5	2.54	max 1.57	PA 66	UL94 V-0	natural
CPST-7-01	11.1	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-7-19	11.1	2.54	max 1.57	PA 66	UL94 V-0	natural
CPST-8-01	12.7	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-8-19	12.7	2.54	max 1.57	PA 66	UL94 V-0	natural
CPST-9-01	14.3	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-9-19	14.3	2.54	max 1.57	PA 66	UL94 V-0	natural
CPST-10-01	15.9	2.54	max 1.57	PA 66	UL94 V-2	natural
CPST-10-19	15.9	2.54	max 1.57	PA 66	UL94 V-0	natural