


CRCBSRE - Reverse Locking Circuit Board Support

Otwór górny: wciskany $\varnothing 4 \pm 0.08$

Grubość panelu: 1.6

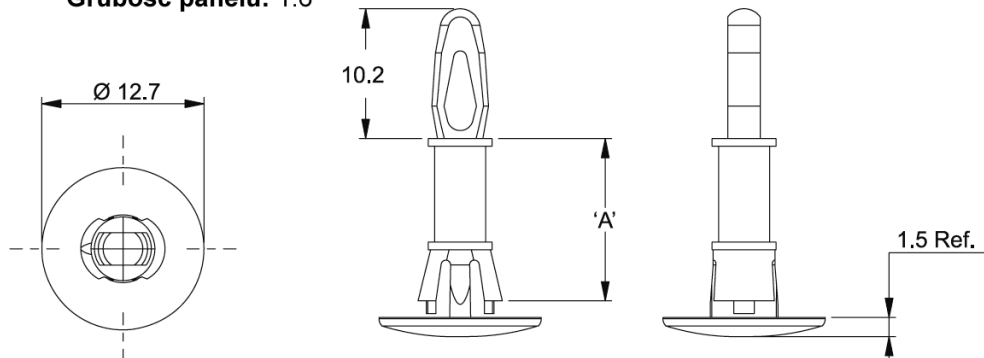

Otwór dolny: zatrzaskiwany $\varnothing 5.4 \pm 0.08$

Grubość panelu: 1.2 - 2



Details:

- **Material:** see table
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Height A ± 0.4	Top mounting hole dia. ± 0.08	Top panel thickness	Bottom mounting hole dia. ± 0.08	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
CRCBSRE-3-01	4.8	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-2	natural
CRCBSRE-3-19	4.8	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-0	natural
CRCBSRE-4-01	6.4	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-2	natural
CRCBSRE-4-19	6.4	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-0	natural
CRCBSRE-6-01	9.5	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-2	natural
CRCBSRE-6-19	9.5	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-0	natural
CRCBSRE-8-01	12.7	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-2	natural
CRCBSRE-8-19	12.7	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-0	natural
CRCBSRE-10-01	15.9	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-2	natural
CRCBSRE-10-19	15.9	4	1.6	5.4	1.2 - 2.0	PA 66	UL94 V-0	natural