


CRLCBSM - Metric Reverse Locking Circuit Board Support

Top Hole Snap Lock: $\varnothing 4 \pm 0.08$
Panel Thickness: 1.6

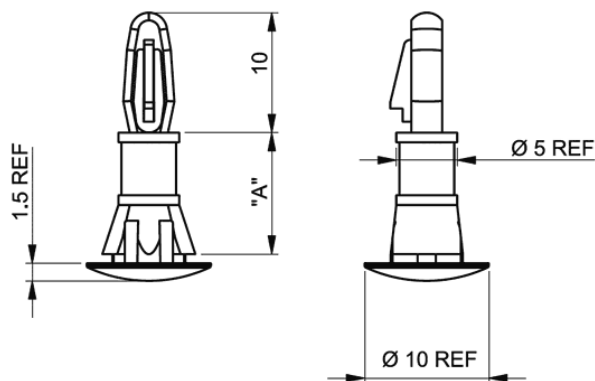

Bottom Hole Snap-lock: $\varnothing 6 \pm 0.08$
Panel Thickness: see table

Details:

- **Material:** UL94 V0 Nylon 6/6, RMS-19*
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Height A	Top mounting hole dia. ± 0.08	Top panel thickness	Bottom mounting hole dia. ± 0.08	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
CRLCBSM-5-19	5	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM-6-19	6	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM-7-19	7	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM-8-19	8	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM-9-19	9	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM-10-19	10	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM-12-19	12	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM-14-19	14	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM-16-19	16	4	1.6	6	0.8 - 1.2	PA 66	UL94 V-0	natural
CRLCBSM1-5-19	5	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural
CRLCBSM1-6-19	6	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural
CRLCBSM1-7-19	7	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural
CRLCBSM1-8-19	8	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural
CRLCBSM1-9-19	9	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural
CRLCBSM1-10-19	10	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural
CRLCBSM1-12-19	12	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural
CRLCBSM1-14-19	14	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural
CRLCBSM1-16-19	16	4	1.6	6	1.6 - 2.0	PA 66	UL94 V-0	natural