


CTS-OUV - Snap-in Cable Tie, UV Resistant

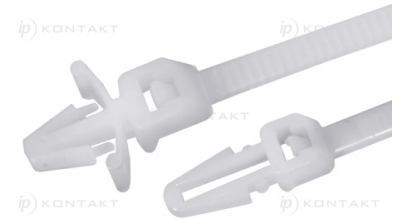

Details:

- **Poliamid 6.6, UL 94 V-2 (V-0 on special order)**
- **Color:** black
- Hole mounting
- UV resistant
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: 100 pcs

Symbol	Length	Width	Max. cable bundle diameter	Breaking force	Mounting hole diameter	Handle width	Type	Material	Flammability	Color
	[mm]	[mm]								
CTS-O-11025-PMT-UV	110	2.5	22	8.1	4.8	2.4	1	PA 66	UL94 V-2	black
CTS-O-13032-PMT-UV	130	3.2	28	13.6	4	2	1	PA 66	UL94 V-2	black
CTS-O-13048-PMT-UV	132	4.8	25	22.2	6.4	3.2	1	PA 66	UL94 V-2	black
CTS-O-17048-PMT-UV	170	4.8	38	22.2	6.4	3.2	1	PA 66	UL94 V-2	black
CTS-O-19048-PMT-UV	200	4.8	45	22.2	6.4	3.2	1	PA 66	UL94 V-2	black
CTS-O-15036-PMT-UV	150	3.6	32	13.6	5.2	2.8	2	PA 66	UL94 V-2	black
CTS-O-20048-PMT-UV	200	4.8	46	22.2	6.3	3.6	2	PA 66	UL94 V-2	black