


CTS-R - Releasable Cable Tie

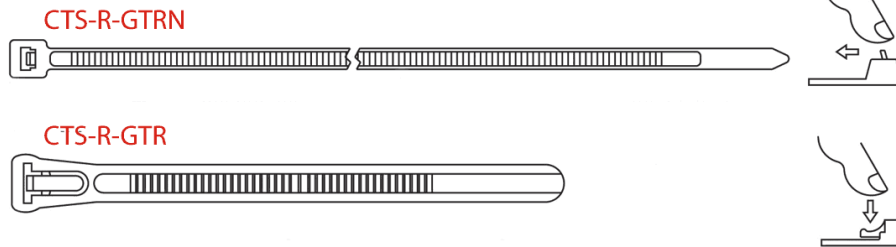

Details:

- **Poliamid 6.6, UL94 V-2 (V-0 on demand)**
- **Color:** natural, others on special order
- Releasable cable ties
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: 100 pcs

Symbol	Length	Width	Max. cable bundle diameter	Breaking force	Material	Flammability	Color
	[mm]	[mm]	[mm]	[daN]			
CTS-R-GTRN-120-HD	120	7.6	26	22.2	PA 66	UL94 V-2	natural
CTS-R-GTRN-150-HD	150	7.6	35	22.2	PA 66	UL94 V-2	natural
CTS-R-GTRN-200-HD	200	7.6	50	22.2	PA 66	UL94 V-2	natural
CTS-R-GTRN-250-HD	250	7.6	66	22.2	PA 66	UL94 V-2	natural
CTS-R-GTRN-300-HD	300	7.6	80	22.2	PA 66	UL94 V-2	natural
CTS-R-GTR-140I	140	3.6	33	18.2	PA 66	UL94 V-2	natural
CTS-R-GTR-200ST	200	4.8	50	22.2	PA 66	UL94 V-2	natural
CTS-R-GTR-300ST	300	4.8	86	22.2	PA 66	UL94 V-2	natural