


CTS-RUV - Releasable Cable Tie, UV Resistant

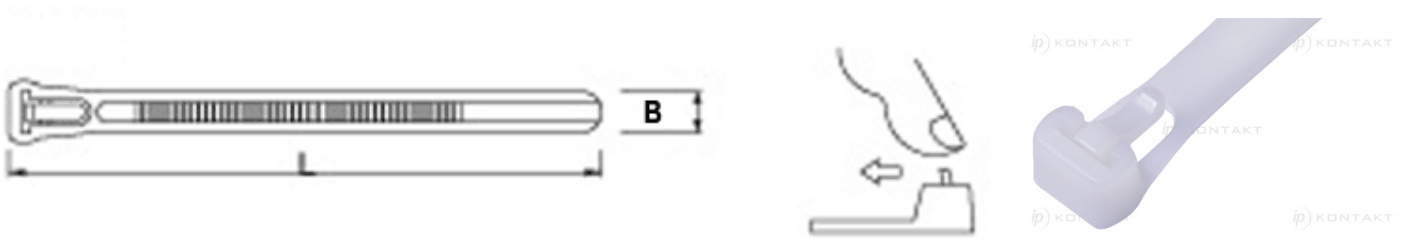

Details:

- **Polyamid 6.6, UL 94 V 2 (VO on special order)**
- **Color:** BLK - black
- UV resistant
- Releasable cable ties
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: 100 pcs

Symbol	Length L	Width B	Max. cable bundle diameter [mm]	Breaking force [daN]	Material	Flammability	Color
	[mm]	[mm]					
CTS-R-GTRN-100-HD-UV	100	7.6	20	22	PA 66	UL94 V-2	black
CTS-R-GTRN-120-HD-UV	120	7.6	26	22	PA 66	UL94 V-2	black
CTS-R-GTRN-150-HD-UV	150	7.6	35	22	PA 66	UL94 V-2	black
CTS-R-GTRN-200-HD-UV	200	7.6	50	22	PA 66	UL94 V-2	black
CTS-R-GTRN-250-HD-UV	250	7.6	66	22	PA 66	UL94 V-2	black
CTS-R-GTRN-300-HD-UV	300	7.6	80	22	PA 66	UL94 V-2	black
CTS-R-GTRN-370-HD-UV	370	7.6	102	22	PA 66	UL94 V-2	black