


CTS-ST - Stainless Steel Cable Tie

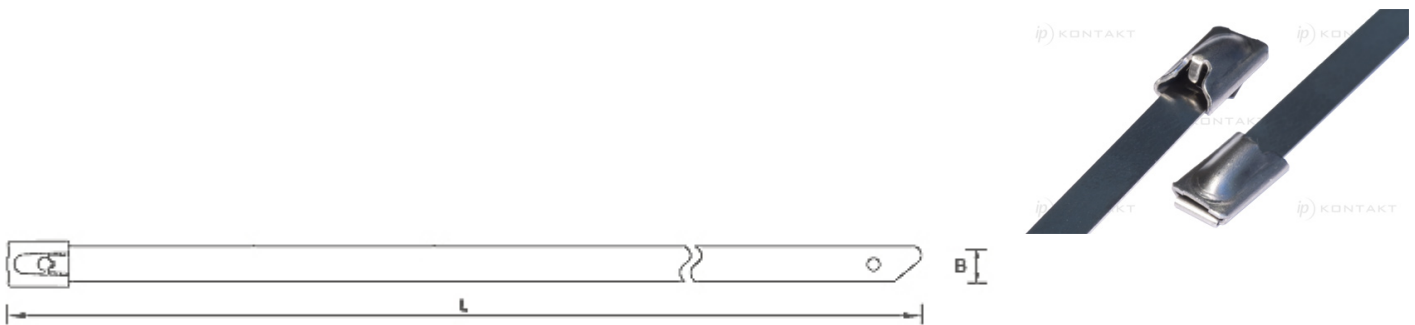

Details:

- **Material: Stainless steel AISI 304**
- **Stainless steel AISI 316L on special request**
- Temperature range : -80°C up to +538°C
- Certification : UL
- Standard pack: 100 pcs

Symbol	Length L	Width B	Max. cable bundle diameter	Breaking force	Material
	[mm]	[mm]	[mm]	[daN]	
CTS-ST-MLT 1 S CP	125	4.6	38	90	stainless steel 304
CTS-ST-MLT 2 S CP	200	4.6	61.9	90	stainless steel 304
CTS-ST-MLT 3 S CP	290	4.6	90.6	90	stainless steel 304
CTS-ST-MLT 4 S CP	360	4.6	112.8	90	stainless steel 304
CTS-ST-MLT 6 S CP	520	4.6	163.8	90	stainless steel 304
CTS-ST-MLT 8 S CP	680	4.6	214.8	90	stainless steel 304
CTS-ST-MLT 9 S CP	840	4.6	265.7	90	stainless steel 304
CTS-ST-MLT 2 H LP	200	7.9	61.9	160	stainless steel 304
CTS-ST-MLT 3 H LP	290	7.9	90.6	160	stainless steel 304
CTS-ST-MLT 4 H LP	360	7.9	112.8	160	stainless steel 304
CTS-ST-MLT 5 H LP	450	7.9	141	160	stainless steel 304
CTS-ST-MLT 6 H LP	520	7.9	163.8	160	stainless steel 304
CTS-ST-MLT 8 H LP	680	7.9	214.8	160	stainless steel 304
CTS-ST-MLT 10 H LP	840	7.9	265.7	160	stainless steel 304
CTS-ST-MLT 11 H LP	1020	7.9	320	160	stainless steel 304