


## CTS-STP - Stainless steel cable ties - Coated

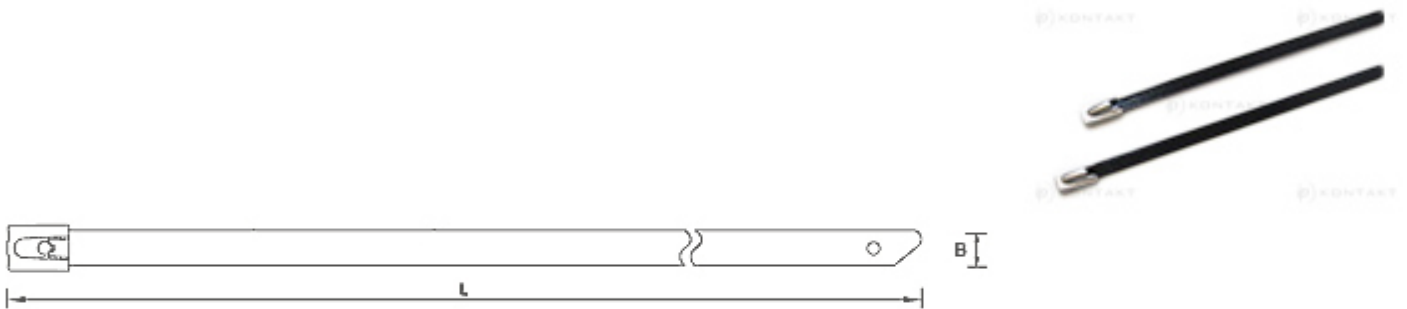

### Details:

- **Material: Stainless steel AISI 304 or AISI 316, coated with Polyester**
- Temperature range : -40°C up to +150°C
- Certification : UL, Lloyd's, DNV-GL
- Standard pack: 100 pcs

Symbol	Length L	Width B	Max. cable bundle diameter	Breaking force	Material	Color
	[mm]	[mm]	[mm]	[daN]		
CTS-STP-0125-46	125	4.6	38	90	stainless steel 304 + PES	black
CTS-STP-0200-46	200	4.6	61.9	90	stainless steel 304 + PES	black
CTS-STP-0290-46	290	4.6	90.6	90	stainless steel 304 + PES	black
CTS-STP-0360-46	360	4.6	112.8	90	stainless steel 304 + PES	black
CTS-STP-0520-46	520	4.6	163.8	90	stainless steel 304 + PES	black
CTS-STP-0680-46	680	4.6	214.8	90	stainless steel 304 + PES	black
CTS-STP-0840-46	840	4.6	265.7	90	stainless steel 304 + PES	black
CTS-STP-0200-79	200	7.9	61.9	160	stainless steel 304 + PES	black
CTS-STP-0290-79	290	7.9	90.6	160	stainless steel 304 + PES	black
CTS-STP-0360-79	360	7.9	112.8	160	stainless steel 304 + PES	black
CTS-STP-0450-79	450	7.9	141	160	stainless steel 304 + PES	black
CTS-STP-0520-79	520	7.9	163.8	160	stainless steel 304 + PES	black
CTS-STP-0680-79	680	7.9	214.8	160	stainless steel 304 + PES	black
CTS-STP-0840-79	840	7.9	265.7	160	stainless steel 304 + PES	black
CTS-STP-1020-79	1020	7.9	320	160	stainless steel 304 + PES	black