


CTS-TZ - Outside Tag Cable Tie

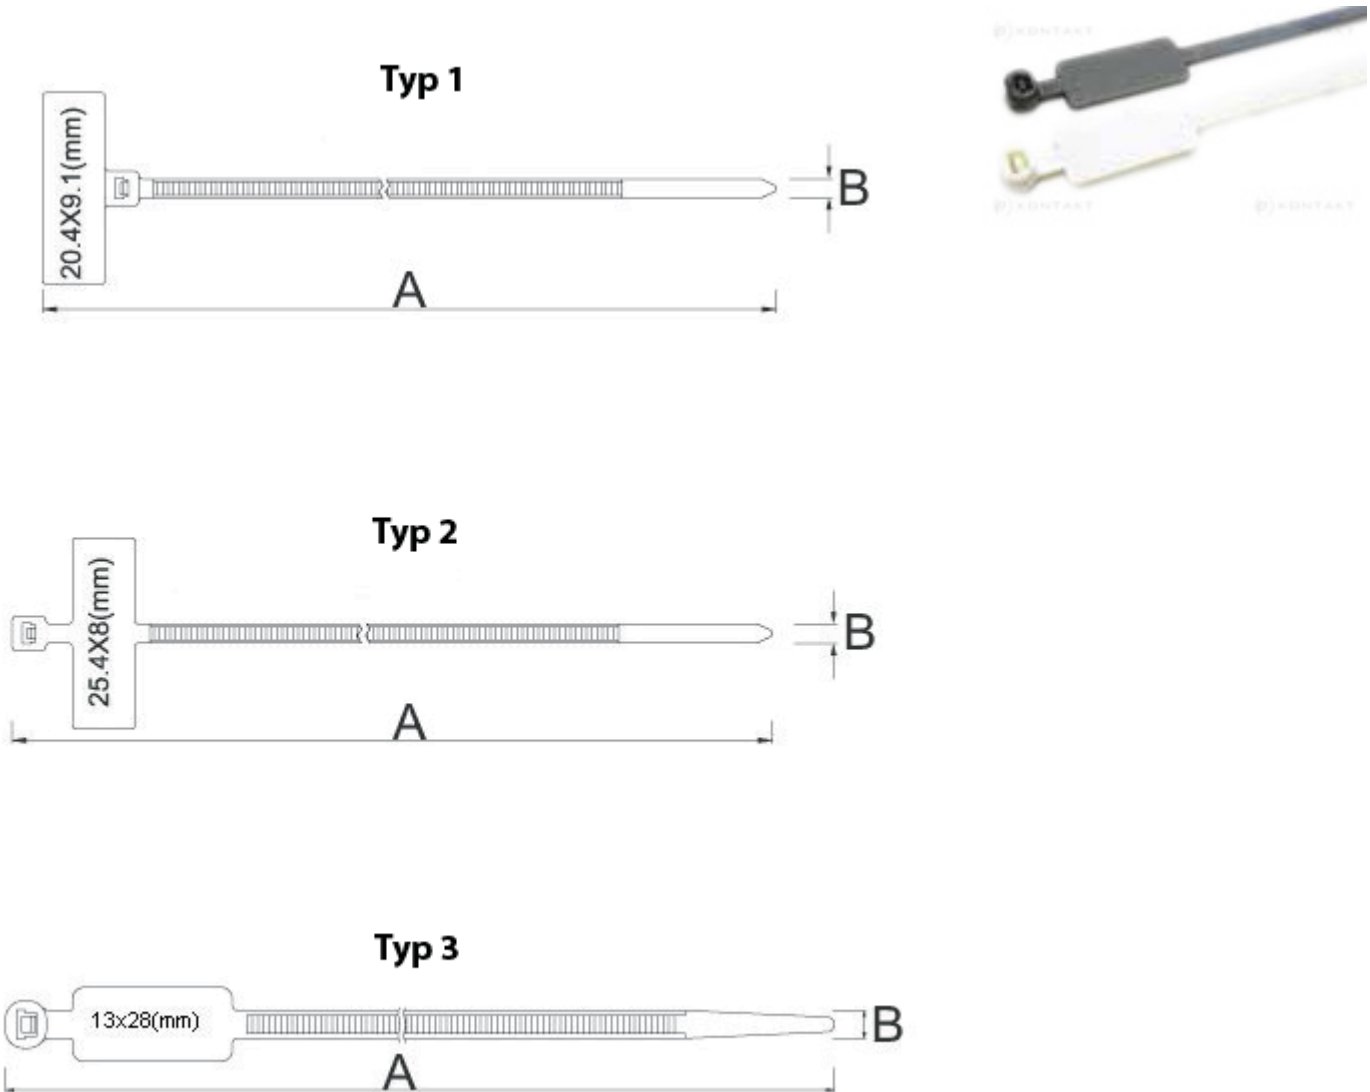

Details:

- **Polyamid 6.6, UL 94 V-2 (V-0 on special order)**
- **Color:** NAT - natural, black - UV resistant
- With label tag
- Working temperature: -35°C do +85°C
- Complies with: E 75050 (S) Spec.: UL appr.; Mil.Spec. 23190D
- Standard pack: see table

Symbol	Length A	Width B	Max. cable bundle diameter	Breaking force	Type	Material	Flammability	Color
	[mm]	[mm]		[daN]				
CTS-TZ-11025-MT	110	2.5	18	8.1	1	PA 66	UL94 V-2	natural
CTS-TZ-21025-MT	210	2.5	50	8.1	1	PA 66	UL94 V-2	natural
CTS-TW-10025-MT	100	2.5	18	8.1	2	PA 66	UL94 V-2	natural
CTS-TW-20025-MT	200	2.5	50	8.1	2	PA 66	UL94 V-2	natural
CTS-TD-19048-MT	190	4.8	46	22.2	3	PA 66	UL94 V-2	natural
CTS-TD-22048-MT	220	4.8	54	22.2	3	PA 66	UL94 V-2	natural

Symbol	Length A	Width B	Max. cable bundle diameter	Breaking force	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[daN]				
CTS-TD-27048-MT	270	4.8	65	22.2	3	PA 66	UL94 V-2	natural
CTS-TD-30048-MT	300	4.8	76	22.2	3	PA 66	UL94 V-2	natural
CTS-TD-37048-MT	370	4.8	102	22.2	3	PA 66	UL94 V-2	natural