


DLCBS4 - Dual Locking Circuit Board Support

Top Hole: Snap-Lock $\varnothing 4.0 \pm 0.08$

Panel Thickness: 1.3-2

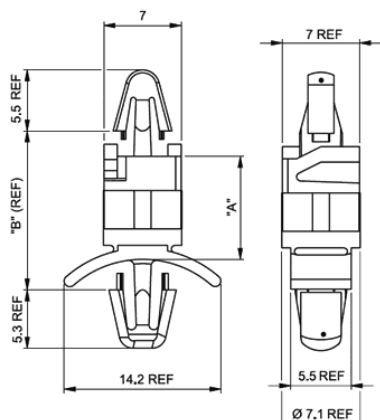

Bottom Hole: Snap-Lock $\varnothing 4.75 \pm 0.08$

Panel Thickness: 0.8-2

Details:

- **Material:** UL94 V-2 Nylon 6/6, RMS-01*
- **Material:** UL94 V-0 Nylon 6/6, RMS-19*
- **Color:** Natural
- **Standard Pack:** 1000/Bag
- **Top Hole:**
 - Snap-Lock $\varnothing 4.0 \pm 0.08$
 - Panel Thickness: 1.3-2
- **Bottom Hole:**
 - Snap-Lock $\varnothing 4.75 \pm 0.08$
 - Panel Thickness: 0.8-2

Symbol	Height A	B	Top mounting hole dia. ± 0.08	Top panel thickness range	Bottom mounting hole dia. ± 0.08	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
DLCBS4-3.5-01	5.5	10.8	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-2	natural
DLCBS4-3.5-19	5.5	10.8	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-0	natural
DLCBS4-4-01	6.1	11.4	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-2	natural
DLCBS4-4-19	6.1	11.4	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-0	natural
DLCBS4-5-01	9.1	14.4	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-2	natural
DLCBS4-5-19	9.1	14.4	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-0	natural
DLCBS4-6-01	12.4	17.7	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-2	natural
DLCBS4-6-19	12.4	17.7	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-0	natural
DLCBS4-8-01	18.8	24.1	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-2	natural
DLCBS4-8-19	18.8	24.1	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-0	natural
DLCBS4-10-01	21.9	27.2	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-2	natural
DLCBS4-10-19	21.9	27.2	4	1.3 - 2.0	4.75	0.8 - 2.0	PA 66	UL94 V-0	natural