


DLCBSAT - Dual Locking Circuit Board Support

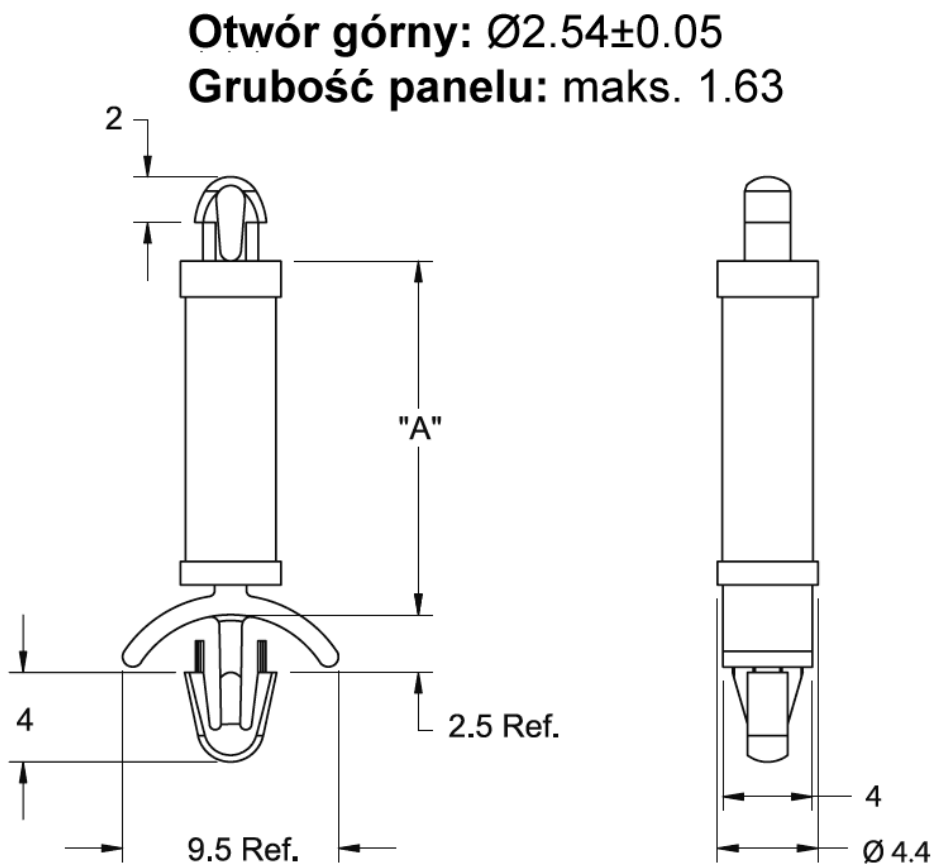

Otwór dolny: $\varnothing 3.18 \pm 0.08$
Grubość panelu: 0.79 - 1.93

Details:

- **Material:** see table
- **Color:** Natural
- **Standard Pack:** 1000/Bag

Symbol	Height A ± 0.4	Top mounting hole dia. ± 0.05	Top panel thickness range	Bottom mounting hole dia. ± 0.08	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
DLCBSAT-2-01	3.2	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural
DLCBSAT-2-19	3.2	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural
DLCBSAT-3-01	4.8	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural
DLCBSAT-3-19	4.8	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural
DLCBSAT-4-01	6.4	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural
DLCBSAT-4-19	6.4	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural
DLCBSAT-5-01	7.9	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural
DLCBSAT-5-19	7.9	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural
DLCBSAT-6-01	9.5	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural

Symbol	Height A ± 0.4	Top mounting hole dia. ± 0.05	Top panel thickness range	Bottom mounting hole dia. ± 0.08	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
DLCBSAT-6-19	9.5	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural
DLCBSAT-7-01	11.1	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural
DLCBSAT-7-19	11.1	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural
DLCBSAT-8-01	12.7	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural
DLCBSAT-8-19	12.7	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural
DLCBSAT-9-01	14.3	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural
DLCBSAT-9-19	14.3	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural
DLCBSAT-10-01	15.9	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-2	natural
DLCBSAT-10-19	15.9	2.54	1.63 max.	3.18	0.79 - 1.93	PA 66	UL94 V-0	natural