
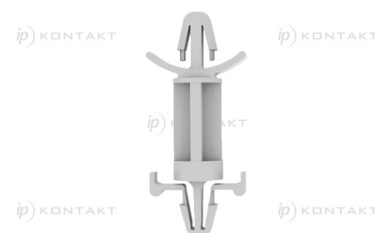


## DLCBSRA - Dual Locking Circuit Board Support

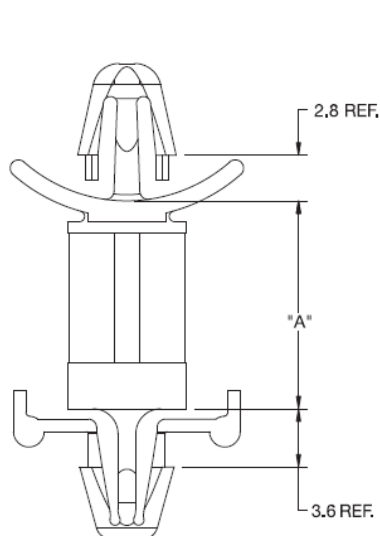

### Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01\*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19\*
- **Color:** natural
- Standard pack: 1000 pcs

| Symbol         | Height<br>A ±0.4 | Top mounting<br>hole dia.<br>±0.08 | Top panel thickness<br>range | Bottom<br>mounting hole<br>dia.<br>±0.08 | Bottom panel<br>thickness range | Material | Flammability | Color   |
|----------------|------------------|------------------------------------|------------------------------|------------------------------------------|---------------------------------|----------|--------------|---------|
|                | [mm]             | [mm]                               | [mm]                         | [mm]                                     | [mm]                            |          |              |         |
| DLCBSRA3-6-01  | 9.5              | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-2     | natural |
| DLCBSRA3-6-19  | 9.5              | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-0     | natural |
| DLCBSRA3-8-01  | 12.7             | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-2     | natural |
| DLCBSRA3-8-19  | 12.7             | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-0     | natural |
| DLCBSRA3-10-01 | 15.9             | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-2     | natural |
| DLCBSRA3-10-19 | 15.9             | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-0     | natural |
| DLCBSRA3-12-01 | 19.1             | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-2     | natural |
| DLCBSRA3-12-19 | 19.1             | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-0     | natural |
| DLCBSRA3-14-01 | 22.2             | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-2     | natural |
| DLCBSRA3-14-19 | 22.2             | 4.75                               | 0.79 - 1.98                  | 4.75                                     | 0.79 - 1.98                     | PA 66    | UL94 V-0     | natural |