


DLSP-1 - Dual Locking Support Post

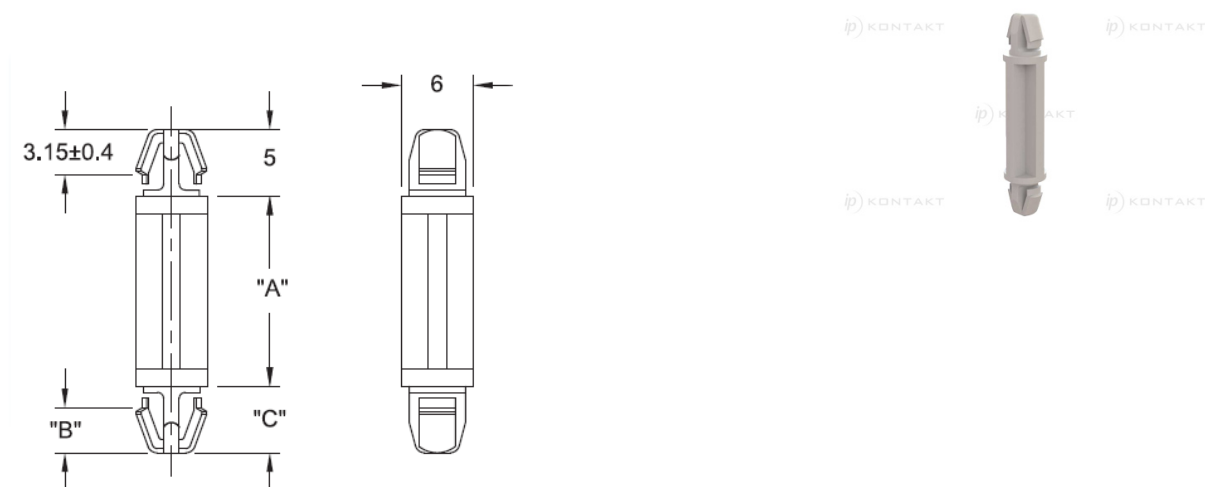

Details:

- **Material: Nylon 6/6, UL 94 V-2, RMS-01***
- **Material: Nylon 6/6, UL 94 V-0, RMS-19***
- **Color: natural**
- **Standard pack: 1000 pcs**

Symbol	Height A ±0.4	B ±0.4	C	Top mounting hole dia. ±0.08	Top panel thickness	Bottom mounting hole dia. ±0.08	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
DLSP-1-3M-01	3	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-3M-19	3	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-4M-01	4	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-4M-19	4	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-6M-01	6	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-6M-19	6	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-8M-01	8	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-8M-19	8	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-10M-01	10	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-10M-19	10	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-12M-01	12	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-12M-19	12	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-14M-01	14	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-14M-19	14	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-16M-01	16	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-16M-19	16	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-18M-01	18	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-18M-19	18	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-25M-01	25	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-25M-19	25	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural
DLSP-1-30M-01	30	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-2	natural
DLSP-1-30M-19	30	3.15	5	4	1.6	4	1.6	PA 66	UL94 V-0	natural