


DLSP-3 - Dual Locking Support Post

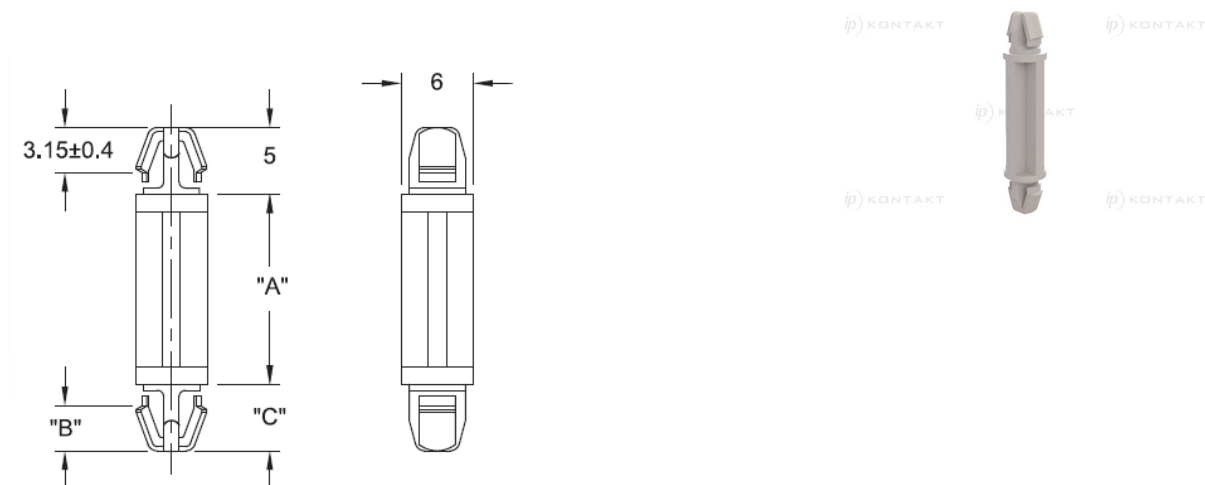

Details:

- **Material:** Nylon 6/6, UL 94 V-2, RMS-01*
- **Material:** Nylon 6/6, UL 94 V-0, RMS-19*
- **Color:** natural
- Standard pack: 1000 pcs

Symbol	Height A ±0.4	B ±0.4	C	Top mounting hole dia. ±0.08	Top panel thickness	Bottom mounting hole dia. ±0.08	Bottom panel thickness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
DLSP-3-3M-01	3	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-3M-19	3	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural
DLSP-3-4M-01	4	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-4M-19	4	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural
DLSP-3-6M-01	6	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-6M-19	6	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural
DLSP-3-8M-01	8	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-8M-19	8	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural
DLSP-3-10M-01	10	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-10M-19	10	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural
DLSP-3-12M-01	12	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-12M-19	12	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural
DLSP-3-14M-01	14	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-14M-19	14	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural
DLSP-3-16M-01	16	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-16M-19	16	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural
DLSP-3-18M-01	18	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-2	natural
DLSP-3-18M-19	18	3.7	5.5	4	1.6	4.8	1.6	PA 66	UL94 V-0	natural