


DTL - Dual End Twist Lock

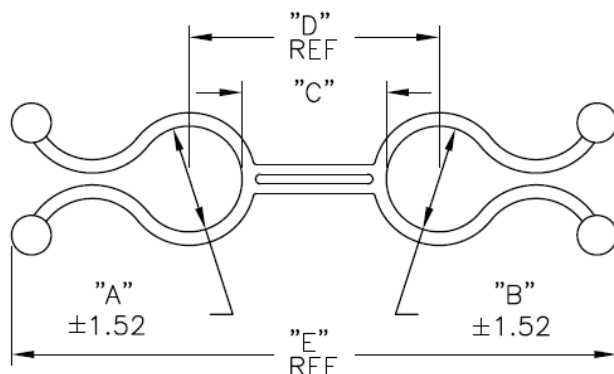

Details:

- Nylon 6/6, UL 94 V-2, RMS-01 *
- Nylon 6/6, UL 94 V-0, RMS-19 *
- Color: natural
- Other colors available on special order
- Standard pack: 1000/Bag

Symbol	Cable diameter range A = B	C	D	E	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
DTL2525-4-01	5.1 - 7.6	6.4	12.7	48.8	PA 66	UL94 V-2	natural
DTL2525-4-19	5.1 - 7.6	6.4	12.7	48.8	PA 66	UL94 V-0	natural
DTL2525-12-01	5.1 - 7.6	19.1	25.4	61.5	PA 66	UL94 V-2	natural
DTL2525-12-19	5.1 - 7.6	19.1	25.4	61.5	PA 66	UL94 V-0	natural
DTL2525-20-01	5.1 - 7.6	31.8	38.1	74.2	PA 66	UL94 V-2	natural
DTL2525-20-19	5.1 - 7.6	31.8	38.1	74.2	PA 66	UL94 V-0	natural
DTL2525-28-01	5.1 - 7.6	44.5	50.8	86.9	PA 66	UL94 V-2	natural
DTL2525-28-19	5.1 - 7.6	44.5	50.8	86.9	PA 66	UL94 V-0	natural
DTL3535-4-01	7.6 - 10.2	6.4	15.2	55.4	PA 66	UL94 V-2	natural
DTL3535-4-19	7.6 - 10.2	6.4	15.2	55.4	PA 66	UL94 V-0	natural
DTL3535-12-01	7.6 - 10.2	19.1	27.9	68.1	PA 66	UL94 V-2	natural
DTL3535-12-19	7.6 - 10.2	19.1	27.9	68.1	PA 66	UL94 V-0	natural
DTL3535-20-01	7.6 - 10.2	31.8	40.6	80.8	PA 66	UL94 V-2	natural
DTL3535-20-19	7.6 - 10.2	31.8	40.6	80.8	PA 66	UL94 V-0	natural
DTL3535-28-01	7.6 - 10.2	44.5	53.3	93.5	PA 66	UL94 V-2	natural
DTL3535-28-19	7.6 - 10.2	44.5	53.3	93.5	PA 66	UL94 V-0	natural
DTL7575-4-01	17.8 - 20.3	6.4	25.4	78.7	PA 66	UL94 V-2	natural
DTL7575-4-19	17.8 - 20.3	6.4	25.4	78.7	PA 66	UL94 V-0	natural
DTL7575-12-01	17.8 - 20.3	19.1	38.1	91.4	PA 66	UL94 V-2	natural
DTL7575-12-19	17.8 - 20.3	19.1	38.1	91.4	PA 66	UL94 V-0	natural
DTL7575-20-01	17.8 - 20.3	31.8	50.8	104.1	PA 66	UL94 V-2	natural
DTL7575-20-19	17.8 - 20.3	31.8	50.8	104.1	PA 66	UL94 V-0	natural
DTL7575-28-01	17.8 - 20.3	44.5	63.5	116.8	PA 66	UL94 V-2	natural

Symbol	Cable diameter range A = B	C	D	E	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
DTL7575-28-19	17.8 - 20.3	44.5	63.5	116.8	PA 66	UL94 V-0	natural