


E-LVI - Low voltage insulators

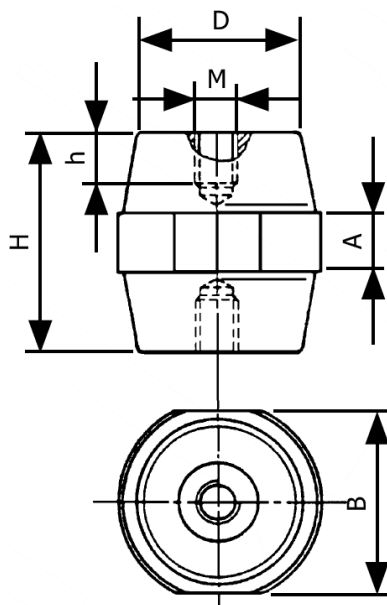

Details:

- **Body material: polyester and glass fibre**
- **Thread material: brass**
- Test voltage: 5 kV
- Rated voltage: 1000 V
- In accordance with: PN-E-91062-1

Symbol	A	Wrench size B	D	Int. thread length h	Height H	Int. thread	Tensile strength	Flexural strength	Recommended max. tightening torque	Recommended max. rail width	Standard pack
	[mm]	[mm]	[mm]	[mm]	[mm]		[daN]	[daN]	[Nm]	[mm]	[szt./pcs]
E-LVI-066-M4	6.6	26	24	5	25	M4	222	166	1.4	30	20
E-LVI-066-M5	6.6	26	24	5	25	M5	222	166	2.6	30	20
E-LVI-066-M6	6.6	26	24	5	25	M6	222	166	3	30	20
E-LVI-098-M6	9.8	33	26	6	30	M6	245	200	3	30	20
E-LVI-098-M8	9.8	33	26	8	30	M8	245	200	6	30	20
E-LVI-081-M6	8.1	32	27	6	35	M6	267	210	3	30	20
E-LVI-081-M8	8.1	32	27	8	35	M8	267	210	6	30	20
E-LVI-081-M10	8.1	32	27	8	35	M10	267	210	10	30	20
E-LVI-101-M6	10.1	40	33	6	40	M6	289	280	3	40	20
E-LVI-101-M8	10.1	40	33	8	40	M8	289	280	6	40	20
E-LVI-101-M10	10.1	40	33	10	40	M10	289	280	10	40	20
E-LVI-101-M12	10.1	40	33	11	40	M12	289	280	14	40	20
E-LVI-100-M6	10	35	28	7	50	M6	445	188	3	30	10
E-LVI-100-M8	10	35	28	10	50	M8	445	188	6	30	10
E-LVI-100-M10	10	35	28	10	50	M10	445	188	10	30	10
E-LVI-160-M8	16	51	34	14	76	M8	667	230	6	40	10
E-LVI-160-M10	16	51	34	14	76	M10	667	230	10	40	10
E-LVI-160-M12	16	51	34	14	76	M12	667	230	14	40	10