


FP-0201 - Plastic rivets

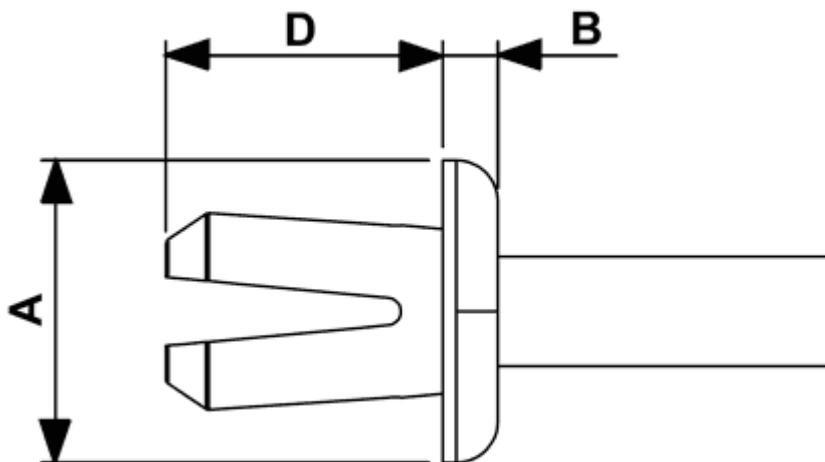

Details:

- **Material: Nylon 6.6**
- **Color: natural or black**
- Flammability: UL94V2
- Working: temperature: -35°C to +85°C

Symbol	A	B	D	Mounting hole diameter	Panel thickness range	Notes	Standard pack	Material	Flammability	Color
	[mm]	[mm]	[mm]							
0201AA01	6.3	1.8	6.5	3.6	3.0 - 5.0	-	5000	PA 66	UL94 V-2	black
0202AA01	7.6	1	9	4	4.0 - 6.0	predriven rivet	5000	PA 66	UL94 V-2	black
6715AA00	7.1	1.9	7.6	4	1.6 - 5.5	-	1000	PA 66	UL94 V-2	natural
6716AA00	7.1	1.9	7.4	4.8	1.6 - 5.5	-	1000	PA 66	UL94 V-2	natural
0207AA00	9.5	2	12	5.5	2.0 - 7.5	-	2500	PA 66	UL94 V-2	natural
0209AA00	11	2	10	6.2	2.5 - 7.5	predriven rivet	2500	PA 66	UL94 V-2	natural
2531AA01	14	2	15	6.5	3.5 - 11	-	2500	PA 66	UL94 V-2	black
0458AA00	15	2	12	6.5	2.5 - 10	-	2500	PA 66	UL94 V-2	natural
5594AA01	16	2	13	8	3.0 - 6.0	predriven rivet	2500	PA 66	UL94 V-2	black